



KRAYONS

PRIME
SERIES

PUR

Protection


PUR guard for
low maintenance &
surface protection
against dirt

MADE
in
INDIA

School Flooring



KRAYONS

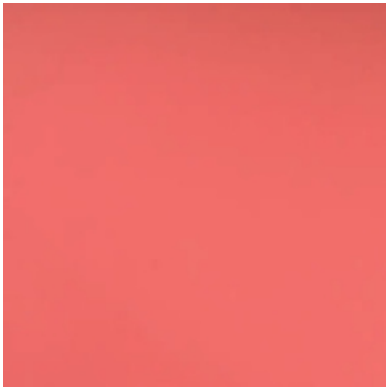

Pastel Pink




Pastel Orange



Pastel Purple




Pastel Cherry

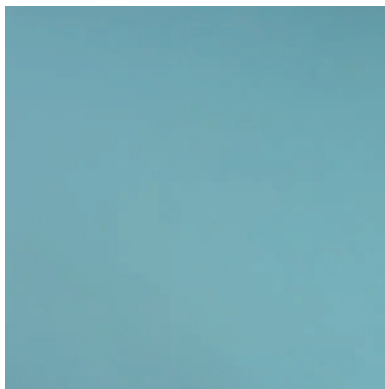

Pastel Blue



Fluorescent

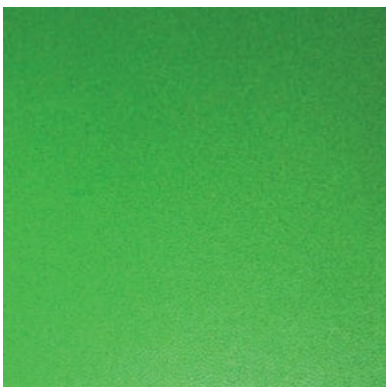

Pastel Green



Pastel Lemon



ORCHIDS The International School - Bangalore



Raichandani Mall Play Zone, Hyderabad



Saifee High School - Mumbai




Frosty Orange



Frosty Red



Frosty Yellow

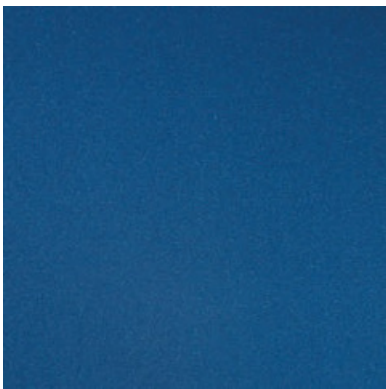

Frosty Blue



Frosty Grey



Frosty Beige



Doon International School - Chandigarh

-The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Krayons is designers delight and a medium to get imaginative and creative by a mix-and-match of different shapes, sizes and colours. Application Areas - It is ideal for schools, educational institutions, playgroup areas, activity areas, children rooms in homes etc.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	KRAYONS
THICKNESS (MM)	EN 428 / ISO 24346	2.00
ROLL WIDTH (MTR)	EN 426 / ISO 24341	2.00
ROLL LENGTH (MTR)	EN 426 / ISO 24341	20
TOTAL WEIGHT (KGS/SQ MTR)	EN 430 / ISO 23997	1.8
SURFACE PROTECTION	PUR	PUR PROTECTION
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	INHIBITS GROWTH OF MICROBES, CLASS A
RESIDUAL INDENTATION (MM)	EN 433 / ISO 23343-1	≤ 0.12 MM
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.10%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS
RESISTANCE TO CHEMICALS	ASTM F925	NO VISIBLE CHANGE - PASS
REACTION TO FIRE (kw/m2)	EN ISO 9239-1	Cfl-S1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	33, 43
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP P
SOUND ABSORPTION	ISO 140-8/EN 150 717-2	Δ LW = 14db
THERMAL RESISTANCE (m2k/w)	EN 12664 / ISO 8302	<0.00568 - PASS
STAIN RESISTANCE	EN 423 / ISO 26987	0, EXCELLENT RESISTANCE
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5
MARITIME USAGES		SUITABLE



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For Inquires :

Contact : +27605021121 // +27113143237

Mail : sales-amari@amaritrading.co.za

Web : www.amaritrading.co.za