





	05	PVC Vinyl Flooring
	06	Antique
	07	Braavo
	08	Challenger
	09	Duratek
	10	Hi-Tech
	11	Krayons
	12	Luxuria
100	13	Matrix/Embossed
	14	Ornate
	15	Transport/Safety
	16	Robust
	17	Siggma
	20	D-Stona Walls
_	22	D-Stona Laminates
	23	Lift Jamb
	23	Pillar
	24	Mouldings
L C	25	Aluminium Composite PVC
9	25	Panel Composite
	26	PVC Foam Board
m	27	Polycarbonate Sheets
	29	Wall & Ceiling Fluted Panels
	47	AUTOMATIC Bending Machi

ne



Antique


Antique is an ideal flooring for residential and semi commercial applications. Available in thickness of 1.50 MM, Antique bornes a high strength wear layer which makes it resistant to heavy foot fall and ensures that the flooring has a long life. It is avaible in wooden designs and wooden embossing's which provide a seamless natural wood look and help replicate the beauty. This premium range of flooring also provides a decent level of sound and heat insulation.

Available in wood designs and Natural wooden surface textures

DIMENSIONS AVAILABLE		
Thickness	1.50 mm	
Roll Width	1.50 mtr, 2.00 mtr	
Roll Length	20 mtr	

Salient Features

It is designed to withstand high wear and tear resistance due to a high strength wear layer.

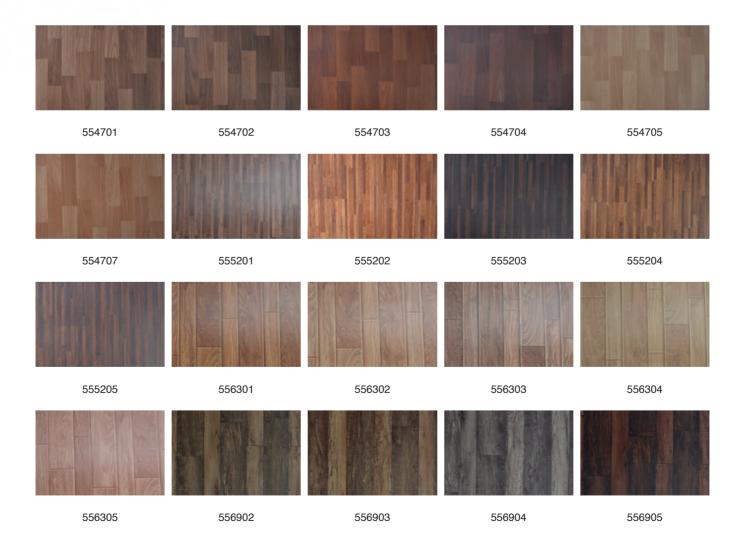

Braavo

Braavo is a premium sports flooring with cushion backing designed keeping in mind the modern-day requirement of a floor that is heavy duty but soft enough for a comfortable and jerk free workout in a gym, sports court or a fitness/wellness centre.

The highly resilient wear layer is produced using speciality resins that take care of the heavy abrasion loads. The 'Impregnated Glass Fibre Tissue" reinforcement provides a very high dimensional stability and lay-flat properties to the product in any weather conditions. The surface is specially treated with PUR surface treatment for a neat & clean surface and easy maintenance. The densely compacted cushioned base layer absorbs the jerks and also adds to the acoustical property of the floor. Recommended application areas are Gymnasiums, Table tennis Courts, Badminton courts, Fitness & yoga centers. Since the flooring is available in plain colours & wooden designs as well and due to its acoustical properties, these floorings are also suitable for Auditoriums, Libraries and in Schools as well. The cushioned floor also makes it a safe floor as it saves children or adults from injuries due to a fall.

Salient Features

- Specially formulated high abrasion resistant wear layer which makes it "T ' rated.
- Superior shock-absorbing cushion base layer.
- These floorings are Glass Fiber Tissue (GFT) reinforced for lay flat, low shrinkage, dimensional stability & strength.
- The product is suitable for medium to heavy traffic areas.
- PUR (Polyurethane) surface treatment enables easy cleaning, scratches resistance & dirt accumulation and also ensures quick cleaning/ mopping.
- Braavo flooring is recommended for indoor use only.



Challenger

Challenger is economically priced, multi-application floorings having a simple two colour directional marble pattern. These are most suitable for offices, Porta Cabins, stores, schools or areas where low-cost products are required but the performance of heavy-duty flooring is required. These floorings are very popular with the Porta Cabin manufacturers or with the Government contractors as these buyers are price sensitive and require a product meeting specifications at a very reasonable cost. Application areas for these floorings are in Porta Cabins, Offices, Shops, Air Conditioned factories, 2 & 3-star hotel industry, etc.

Salient Features

- Attractive shades.
- Fully Flexible & durable
- PUR coating can also be done against specific order.
- Application areas offices, stores, schools, Porta Cabins, Pre-fabricated building industry, low cost housing, etc.


DIMENSIONS AVAILABLE	
Thickness	from 1.50 mm to 3.00 mm
Roll Width	1.50 mtr, 2.00 mtr
Roll Length	12 to 15 mtr



Duratek

Duratek is a residential flooring available in a wide array of designs to match the ever changing needs of the residential segment. It is crafted keeping in mind an economical price point along with high feasibility and usability. Along with residential applications, Duratek is also well suited to be laid in offices, libraries, etc. The large range of designs ensures that all pallets are catered to.

DIMENSIONS AVAILABLE	
Thickness	1.00 mm
Roll Width	2.00 mtr
Roll Length	20 mtr

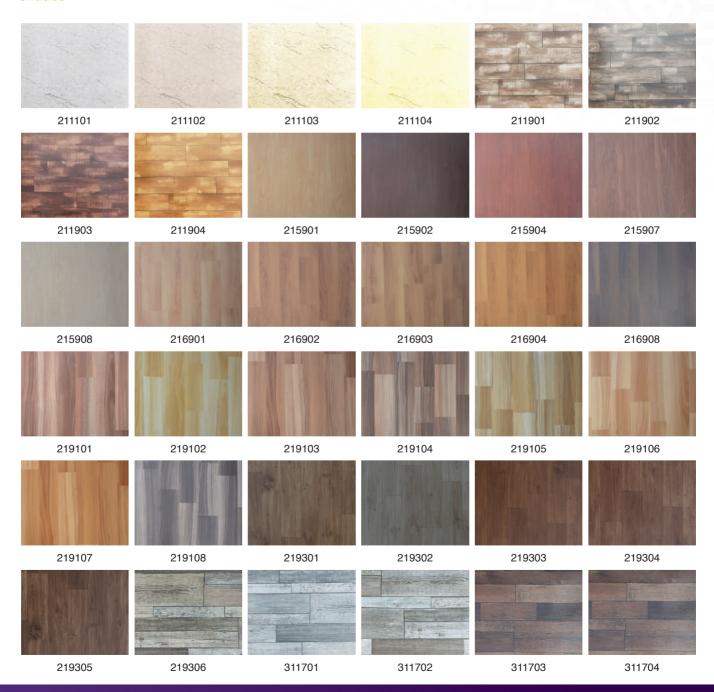

Hi-tech

Hi-tech is high quality printed vinyl flooring. The wear layer is of a thicker type as compared to thinner floorings which make it suitable for semi-commercial use. The thickness of 1.30mm also helps in hiding under floor undulations to a certain extent. The choice of patterns includes wooden, stone and marble. It is an ideal flooring for medium-sized offices having a reasonable footfall. flooring, retail flooring and home flooring.

Application areas for such floorings are mainly in small offices, residential, small hotels & shops, back offices in schools & hospitals, etc.

Salient Features

 Hitech is the collection of wooden, stone and pleasing marble designs in a host of ranges from classic to premium designer rolls.

- This is a high quality printed floor covering, having the same colour base and a very tough top wear layer of 0.15mm.
- The perfect choice for beautifying homes, shops, offices, showrooms, residences etc.

DIMENSIONS AVAILABLE	
Thickness	1.30 mm, 2.00 mm
Roll Width	2 mtr
Roll Length	20 mtr



Krayons

Krayons is from the cushion vinyl range from WONDERFLOOR. Krayons are available in a range of bright & lovely colours to add freshness, cheerfulness and joy to the interiors. Krayons is designers delight and a medium to get imaginative and creative by a mix-and-match of different shapes, sizes and colours. The product is available in roll form but can be cut into shapes & mixing & matching of various colours and designs is possible very easily due to its flexible nature. The flooring comes with Glass Fibre Tissue impregnation for dimensional stability leading to very minimal shrinkage and also has a PUR coating on the top surface to provide maintenance-free & neat and clean surface. Application Areas - It is ideal for schools, educational institutions, playgroup areas, activity areas, children rooms in homes etc. These floorings are installed in offices and the hospitality industry as they greatly enhance the environment with their vibrant colours.

Salient Features

- Lay flat properties
- Very easy to lay
- Specially formulated high abrasion resistant wear which makes it a 'P' rated
- Superior shock-absorbing cushion base layer.
- These floorings are Glass Fiber Tissue (GFT) reinforced for dimensional stability and strength
- The product is suitable for medium traffic areas
- The surface is PUR treated for easy maintenance.
- Highly dimensionally stable No shrinkage at joints.

DIMENSIONS AVAILABLE	
Thickness	2.00 mm, 3.00 mm
Roll Width	2.00 mtr
Roll Length	20 mtr



Luxuria

Luxuria is a superbly crafted premium range of residential flooring equipped with glass fibre tissue impregnation and a cushion base for extreme comfort while walking barefoot in homes. This range of flooring is suitable for those who are looking for stylish flooring providing elegance, comfort, style and warm interiors. It has extra cushioning for more comfort with beautiful design patterns for lifting your home interiors.

These floorings are recommended for use in residential homes and are user friendly in cold weather conditions.

- Luxuria range comprises of stone and wood designs and other contemporary themes,
- Sound absorption quality
- · Extra soft, cosy and comfortable,
- Ideal for cold climate
- Excellent dimensional stability ("Glass Fibre tissue" impregnated)
- · Suitable for Residential use

Salient Features

DIMENSIONS AVAILABLE	
Thickness	2.00 mm, 2.50 mm
Roll Width	2 mtr
Roll Length	20 mtr, 25 mtr



Matrix/Embossed


The Matrix Embossed Floorings has a deep embossed top surface meant to provide extra grip for safe movements. These floorings are produced in a wide range of deep embossing designs which provides anti-slip surface. These floorings are used in passenger buses as OEM equipment as they provide a slip-resistant floor. Designs like Coin, Chequer Plate, Dew Drops, Hexagon, Diamond etc. are very popular & provide a neat geometrical pattern on the floor.

Application Areas – Ramps, Wet areas in Hospitals, Fitness centres, Buses & trains, etc.

Salient Features

- Available in Solid colours with either Homogeneous type or heterogeneous type in various embossing on the top layer in pleasing metallic colours like Aluminum, Copper, Gold, etc or solid colours like Black, Red, Yellow, etc.
- They are 'M" or "P" rated depending upon the thickness and have a slip resistance of R10.
- Can be produced with Low Fire & Smoke properties for Buses & trains.
- The product is suitable for sale in Europe and fire safety approvals have been obtained from European labs.
- Custom colours can be produced as per the customer's preference.

DIMENSIONS AVAILABLE		
Thickness	2.00 mm, 3.00 mm	
Roll Width	2.00 mtr	
Roll Length	20 mtr	

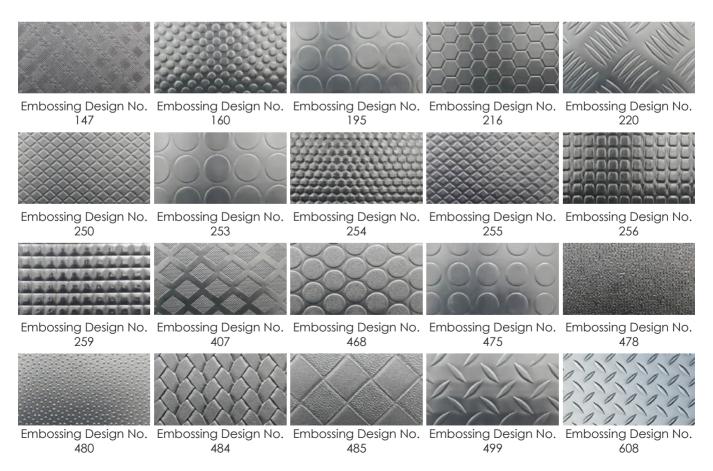

Ornate


Ornate is available in natural wood and stone designs. The classy wooden and stone surface textures further add to the natural look and aesthetic of the flooring. These floorings are having Glass Fibre Tissue impregnation and PUR surface treatment which enable minimum maintenance & long service life. The hard-wearing clear transparent wear layer makes it suitable for residential and semi-commercial applications like offices, schools, libraries, restaurants, clubhouses, clinics, stores & hotel rooms, etc. The top surface is PUR protected for ease in maintenance and offer above-average resistance to scratch and stains.

Salient Features

- Lay flat properties
- Compact cushion bottom suitable for semicommercial Areas.

- PUR (Polyurethane) surface treatment enables easy cleaning, scratches resistance & dirt
- Accumulation and also ensures quick cleaning/ mopping.
- Natural like wooden and stone surface texture and available in vibrant colours.
- High dimensional stability No shrinkage at joints.
- Application areas: Home, Offices, Light Commercial Areas etc.

DIMENSIONS AVAILABLE		
Thickness	1.6 mm	
Roll Width	2.00 mtr	
Roll Length	20 mtr	

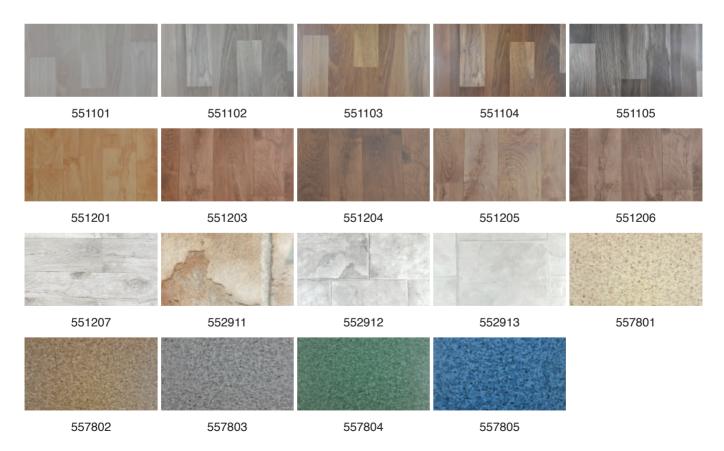

Transport/Safety

These are special floor coverings embedded with Silicon Carbide (Corundum) grains on the top surface which provide a very high slip resistance rating. Due to a superior PVC content and Silicon Carbide Grains, these floorings can withstand very high abrasion and are most suitable for areas where there is heavy footfall & anti-slip properties are required like: Buses, Trains, Ramps, Wet Areas, etc. These floorings are also produced with special additives to meet stringent Fire & Smoke properties prevalent for use in Buses & Railway coaches. For aesthetic properties, these floorings are also embedded with multi-colored Polymer chips in contrast colors giving it a look of a Non Directional flooring in Mosaic pattern TRACTION safety floorings are normally produced with a smooth A surface finish, however for enhanced slip resistance they are produced with an embossed surface finish from our "Matrix" range.

DIMENSIONS AVAILABLE

Thickness

Roll Width

Roll Length

1.50mm to 3mm

2.00 mtr

15mtr

Salient Features

- The produced as per ISO requirements and with Fire & Smoke emission requirements which are most important for the transport industry.
- Product is "T" rated due to its high abrasion resistance properties.
- Available in plain colors or with multi-colored chips
- Also Available with Glass Scrim Reinforcement for very high Dimensional Stability.
- Suitable for the transport sector like Buses, Trains, Lifts, Loading Ramps, Walkways, Wet Areas, etc.



Robust

Robust is a heavy-duty, fully flexible marbled PVC floor covering of high quality.

This product has a unique 2 colour marbling pattern all over the thickness and is extremely pleasing to the eyes and the décor. Robust adds to the aesthetics of the area where it is installed, as it is produced with one base colour and 2 contrast colours for marbling effect by a special hot granulation process which is unique. These floorings, in thickness 1.50mm & above, are also having PUR surface treatment for easy maintenance and very long service life.

These floorings are suitable for use in Offices, Airconditioned factories, the Healthcare industry, Auditoriums & Libraries, Shops & showrooms and Schools & Colleges as they are available up to 3.00mm in thickness.

Salient Features

 They are 'P" rated and have a slip resistance of R9.

- The floorings are embossed with a "Raindrop" embossing design which enables quick cleaning & easy maintenance.
- Robust is available with PUR (Polyurethane) surface protection providing resistance against scratches & dirt accumulation and also ensuring quick cleaning/ mopping.
- Robust is most suitable for Offices, Shops, Factories, Porta Cabins, Auditoriums, schools, libraries, healthcare etc.

DIMENSIONS AVAILABLE		
Thickness	1.0 mm to 3.0 mm	
Roll Width	1.50 mtr, 2.0 mtr	
Roll Length	12 mtr to 20 mtr	



Siggma


A specialized homogeneous flooring designed for the healthcare/pharma industry keeping in mind the heavy footfalls, trolley movements. Siggma PVC flooring is surface treated with Polyurethane (PUR), to provide above-average resistance to scratches, scuff marks, stains, dirt accumulation to ensure easy cleaning and mopping. SIGGMA is available in rolls of 1.50mtr width and can be supplied in tile as well. These floorings are most suitable for Hospitals & Clinics but due to their aesthetic look & appearance in pastel shades and suitable for heavy-duty use, these floorings are installed in offices, airconditioned factories & Pharma units, Shops & showrooms, Offices and in Auditoriums & Libraries.

Salient Features

- Homogeneous, hard-wearing, smooth top finish for easy cleaning
- The random marbled patterns in pastel shades are pleasing to the eyes.
- Advanced Antibacterial/ fungicidal properties best suitable for the healthcare industry.

- The Product meets fire & smoke requirements as per EN Standards and is approved by ARAI, India.
- Heavy Duty "T" rated flooring suitable for heavy traffic areas & movement of wheelchairs, wheeled stretchers, portable diagnostic equipment etc.
- Surface treated with PUR with anti-dirt, which minimizes scratches, scuff marks, stains and maintenance.
- The flooring joints can be made seamless by way of thermal welding using the recommended welding cords & equipment. Custom colours can be produced as per the customer's preference.


DIMENSIONS AVAILABLE		
Thickness	1.50 mm to 3.00 mm	
Roll Width	2.00 mtr	
Roll Length	20 mtr	

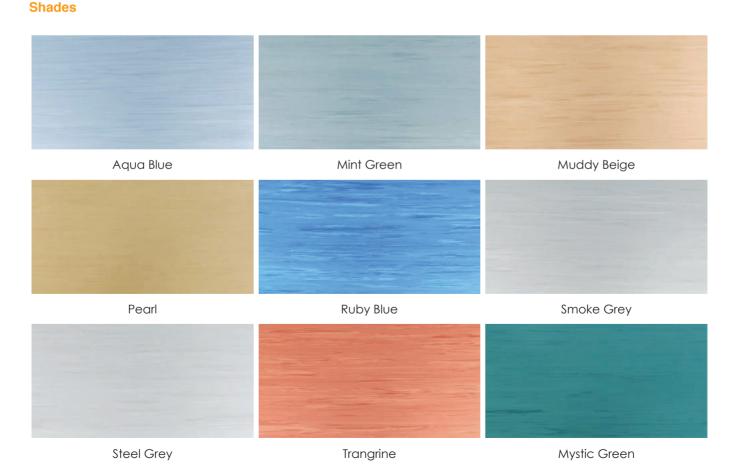







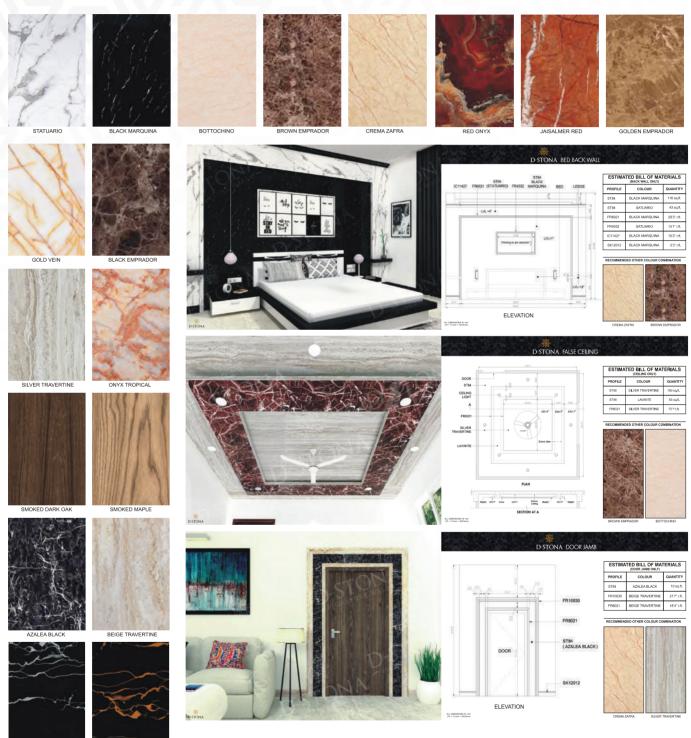

NOTE: AVAILABLE IN MAIT AND GLOSS SURFACE FINISH
































TERMITE PROOF



QUICK INSTALLATION



FIRE RETARDANT





D-Stona Laminates

Revamping your home can be difficult sometimes. Considering PVC laminates for your modular laminates for kitchen, wardrobe, or furniture may be a good option if you are looking for the ultimate decorative finish. In addition, their versatility and durability make them popular for usage in house interiors, providing a fashionable touch.

What is PVC laminate?

PVC laminate is a sheet of material created by fusing decorative paper and plastic resins in the shape of sheets. They are available in various finishes, including matte, glossy, textured, high gloss, and various patterns and plain colours. Laminates are glued on MDF or plywood and completed by edge banding the edges of the panels on both sides. While high gloss laminates have a similar look to acrylic, they are not the same material.


PVC laminate are flexible laminate sheets that can be stretched around the edges up to 90 degrees, removing their requirement. In addition, because they are resistant to corrosion, termites, heat, and water, PVC is an excellent choice for kitchen cabinets and countertops, among other things.





LIFT JAMB




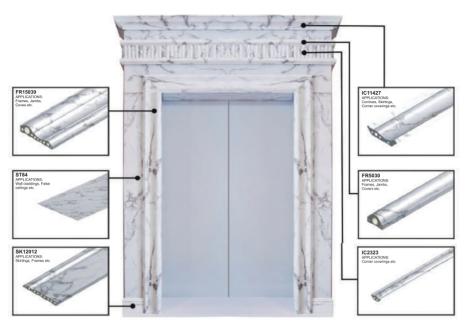

PILLAR



SHEET & ACCESSORIES








MOULDINGS





With wide range of applications, D-stona is sure to add elegance to your interiors by giving it a touch of class, its beautiful mouldings and metal sections give the perfect look for walls and a wide range of furniture.



















INSTALLATION PROCESS

Dstona fabrication requires almost the same tools that are used for wood fabrication. It can be cut into required sizes using a mitre saw or a hand cutter and for final adjustments a planer knife can be used over the edges, Compared to many traditional products, Dstona is hassle free to install and requires no polishing or maintenance. Generally pasted on our 'PVC wall base boards' using structural silicone adhesives, It can also be pasted over cement and wood surfaces. And with our metal section accessories, Dstona sheets can be quickly fixed using just screws, saving cost on both labour and adhesive.




ALUMINIUM COMPOSITE PANEL

ACPs/ACM are commonly used for building cladding, Insulation and for Signage. They are light in weight, rigid and high in strength. ACP can be produced in metallic, nonmetallic colours as well as mirror finish.


- 2mm LITE Grade for backing boards and flat cut-out signs. Cost effective replacement for Chromadek sheets.
 - 3mm Signage Grade in Standard colors & Corporate Colours
- 4mm Construction Grade for building cladding and heavy-duty Pylon signs







PANEL COMPOSITE

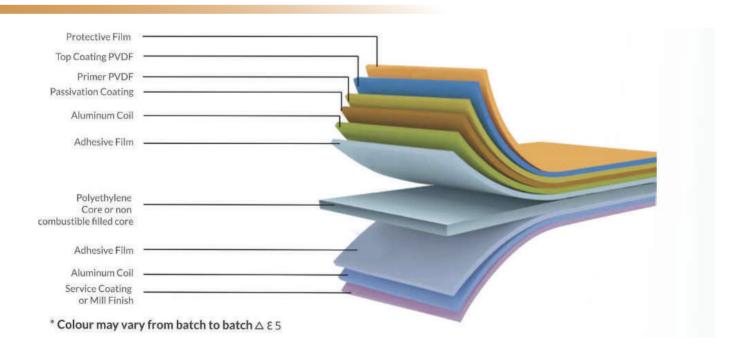

PVC FOAM BOARD

PVC Foam Board or OCT-Foam board is a rigid, light weight extruded sheet with a fine & homogeneous closed cell structure that has a smooth matte surface finish on both sides although the surface is relatively hard and scratch resistant. PVC foam board has very low moisture absorption and the mixture of Polyvinyl chloride and pleurae has good bond strength. PVC foam takes solid shape due to its linear structure. PVC foam board can be cut as easily as wood, softened and shaped by immersing in boiling water or with a standard heat gun, and painted with standard automobile paints.

PVC foam sheets provide a low maintenance solution for walls, floors and ceilings where hygiene is a priority. Oct-Foam Board can replace plywood in light concrete form work. Due to its water resistant qualities it can be used more than once and gives the concrete a smooth finish with no need for further finishing. The PVC Board is environmentally friendly and resistant to chemicals and corrosion making it a more suitable and profitable choice when it comes to concrete form work.

PVC FOAM BOARD APPLICATIONS

Furniture: Bathroom and Kitchen cabinet, Desks and shelving as well as storage cabinets in high humidity zones.

Available: 2mm - 24mm

Building Sector: Partition walls, shop fittings, interior decorating, ceiling and wall cladding as well as concrete form work.

Advertising: Signs and billboards, screen printing and exhibition stands.

ADVANTAGES OF USING PVC FOAM BOARD

- Moisture resistant.
- Light weight but strong.
- UV and weather resistant.
- Flame retardant.
- · Chemical resistant.
- Easy to use.



POLYCARBONATE SHEETS

EURO-LITE® is an insulated roofing, cladding and glazing substrate, manufactured from damage resistar polycarbonate with added co-extruded long life protection against UV weathering. It weighs half the weight of plate glass, making handling and installation ultimately more convenient. It lets the light in while keeping the heat out for maximum comfort. Our polycarbonate multiwall features 10 year warranty including superior performance against loss of light transmission.

Polycarbonate sheets are transparent or opaque but can withstand far more extreme temperatures than other materials like glass or fibreglass. It can tolerate see-saw temperature swings from -40C to +120C while remaining durable as ever!









It can be applied to an outside terrace, braai area roof covering or used simply for partitioning walls and sky-lighting in roofing/awning systems; the benefits of using this material are enormous.



Thickness & Size


6mm 2100mm x 5800mm

Colours available

Clear and Bronze (Brown)



WALL & CEILING FLUTED PANELS

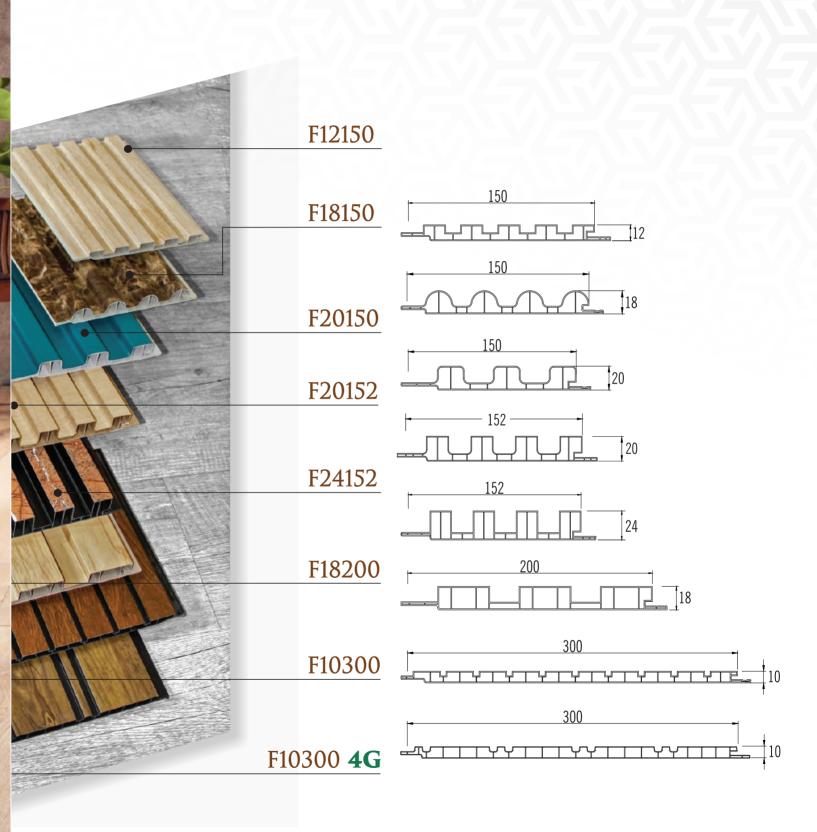






Standard Length - 10 Feet Thickness - 18 mm Width -200 mm

Shade - R I I O FM

Section F10300 4G

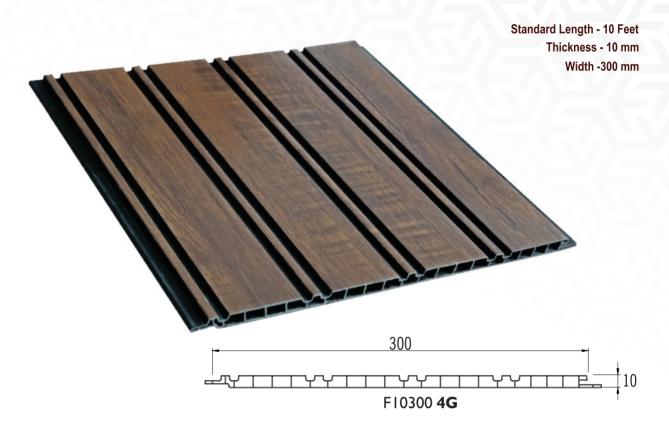





Shade - R 108 CC



Standard Length - 10 Feet Thickness - 18 mm Width -200 mm

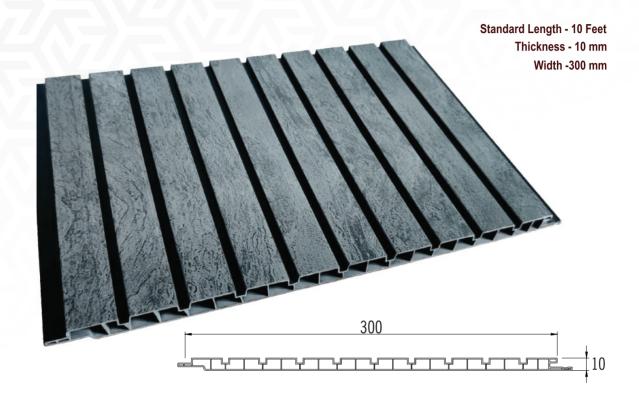

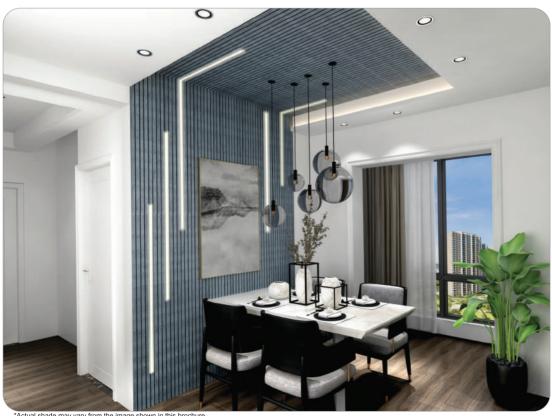

Shade - PFP 1011 CC

Standard Length - 10 Feet Thickness - 10 mm Width -300 mm



Shade - R 114 CC

Standard Length - 10 Feet Thickness - 10 mm Width -300 mm



Shade - PFP 1021 CC

Standard Length - 10 Feet Thickness - 10 mm Width -300 mm



Shade - PFP 1027 CC



Standard Length - 10 Feet Thickness - 10 mm Width -300 mm



Standard Longth - 10 Foot

Standard Length - 10 Feet Thickness - 10 mm Width -300 mm





Shade - R 107 FM

Standard Length - 10 Feet



Shade - R II6 FM

Standard Length - 10 Feet Thickness - 20 mm Width - 152 mm




Standard Length - 10 Feet

Standard Length - 10 Feet Thickness - 20 mm Width - 152 mm



Shade - Supermatt 6 FA

Standard Length - 10 Feet Thickness - 20 mm Width - 152 mm

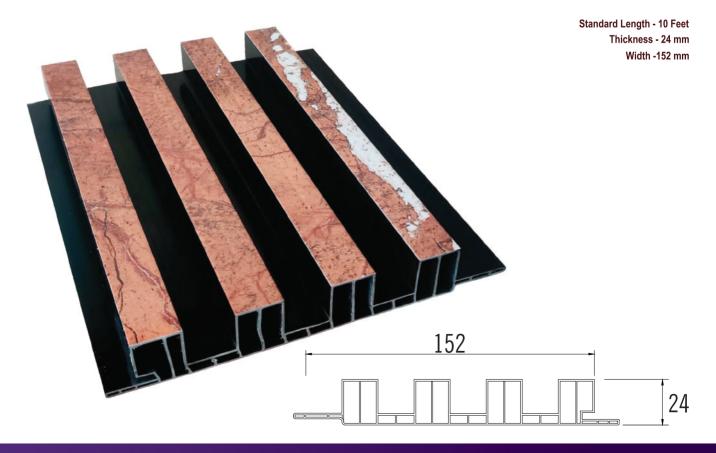



Shade - Marble 13 CC




Standard Length - 10 Feet Thickness - 24 mm Width -152 mm



Standard Length - 10 Feet Thickness - 24 mm

Width - 152 mm

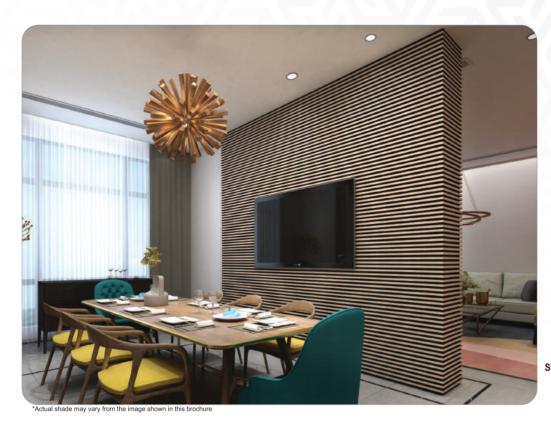

Shade - R II2 CC

Standard Length - 10 Feet Thickness - 24 mm Width - 152 mm

Standard Lenoth - 10 Feet
Thickness - 12 mm
Width - 150 mm







Standard Length - 10 Feet Thickness - 18 mm Width -200 mm









Shade - R 120 FM

Standard Length - 10 Feet Thickness - 18 mm Width -150 mm


*Actual shade may vary from the image shown in this brochure



42










Standard Length - 10 Feet Thickness - 20 mm Width -150 mm

Application - Section F20150




Shafes - Blaze Printed Finish

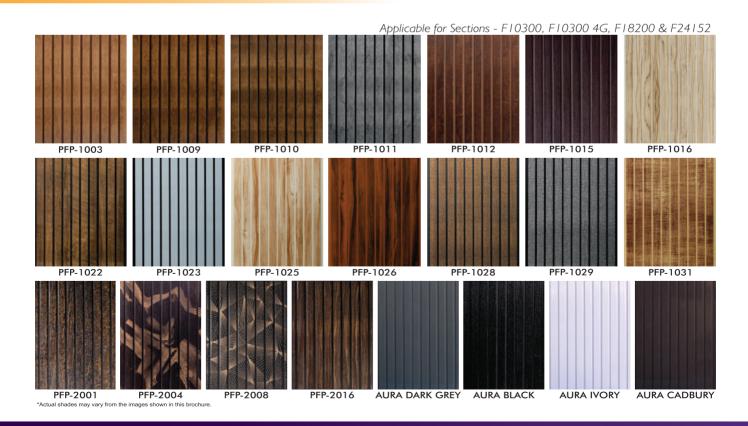

Thickness - 20 mm Width -150 mm

Shades - Premium Membrane Finish

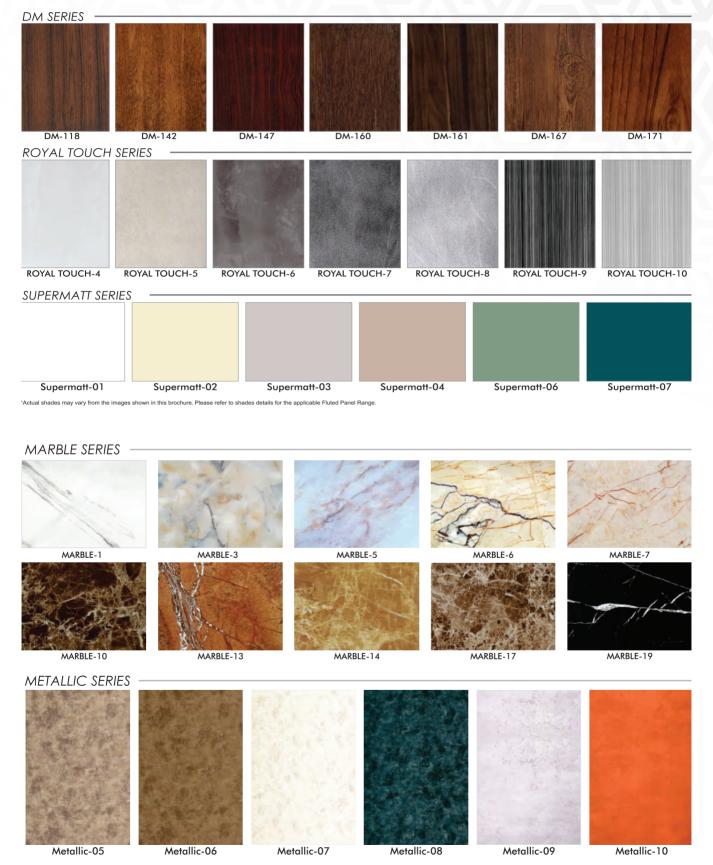

^{*}Actual shades may vary from the images shown in this brochure. Please refer to shades details for the applicable Fluted Panel Range.

Shafes - Blaze Printed Finish



MACHINES AUTOMATIC Bending Machine



Manual Bending Machine

Acrylic bending machine is also called plastic plate bending machine, soften and bending the plastic plate by heating.

Application Materials:

Plastic plate: Acrylic, Plexiglass PVC, PC, ABS, PP etc.

Available Size:

Sheet Thickness 1-10mm bending length≤650mm/≤1250mm.



Technical Specifications			
Model	ZD-2400B		
Heating Tube	Up and Down, 2 Tubes		
Thickness	Within 15mm		
Length	2400mm		
Heating Gap	1-30mm		
Bending Height	Within 450mm		
Bending Angle	30-175 degree		
Angle Setting	Manual Fine Tuning, Equipped with		
	Electronic Angle digital display for precise		
	angle		
Scope of Application	Plexiglass (Acrylic), PC, PVC, PP, PE, PS		
	Board and other plastic materials		
Power	220V (50/60Hz)-4800w		

Parameters

Mode	əl	Theory	Applicable length	Applicable Thickness	Voltage	Power	Temperature range	Packing size	Gross weight
ABM7	00	Thermal Forming	≤650mm	1-10mm	110V/220V	1000W	0-6000°C	1250x430 x210mm	25 KG
ABM1	300	Thermal Forming	≤1250mm	1-10mm	110V/220V	1500W	0-6000°C	1910x430 x210mm	35 KG

NEW EVA II

Co2 laser engraving & cutting machine with glass laser tub.











With Honeycomb Table Best for Leather & Fabric, Paper Cutting







FEATURES

Linear inner sliding guide rail long life, smooth & high speed operation.

Support work time preview, interruptible engraving and cutting re-continue after power off.

Dynamic 4.3 color TFT LCD display of trajectory and coordinate point, show the real work track area, laser power and speed.

Red Light Pointer realizes the exact laser beam cutting position.

Pass through for long length of work piece in Y-axis direction.

Machine is provided with mounting legs so there is no vibration in machine & it can be adjusted on zero level.

SPECIFICATIONS

MODEL	EVA 21-11	EVA 32-II	EVA 43-II	EVA 48-II	
X,Y Cutting Area	2' ft. x 1.5' ft. (600 mm x 457 mm)	3' ft. × 2' ft. (915 mm × 610 mm)	4' ft. x 3' ft. (1220 mm x 915 mm)	4' ft. × 8' ft. (1220 mm x 2440 mm)	
Laser Power	60W	80W / 100W	80W / 100W / 130W	80W / 100W / 130W / 150W	
Laser Source	Sealed Glass Co2 Laser Tube				
Travelling Speed	600 mm/s				
Reposition Accuracy	0.02 mm				
Minimum Letter Size	1.0 mm (English Font)				
X Y Movement System	Belt Transmission				
Z - Axis Movement	Automatic Up to 180 mm (optional)				
Power Adjustment	1 to 100 %				
Driving System	Stepper Motor/servo motor				
Operating System	Win 7 /8/10, 32/64 bit				
Computer Interface	Udisk, USB, Ethernet				
Supported Format	PLT, DXF, BMP, JPG, AI, DWG, BMP, GIF, HPGL				
Compatible Software	CorelDRAW, AUTOCAD, Photoshop, Tajima				
Working Voltage	Single Phase 220-230V / 50Hz-60Hz				
Operating Environment	45°C, Humidity 5% - 80%				
Memory Buffer	128 MB				
Fume Extraction System	External exhaust system with minimum flow rate 1200m3/h (CFM 706 ft3/h), Connection output 4" Diameter				
Overall Dimension (L x W x H)	1010 x 490 x 1030 mm	1170 × 1530 × 1000 mm	1450 x 1780 x 1070 mm	3440 x 2172 x 1030 mm	
Weight	190 Kg	243 Kg	332 Kg	860 Kg	
Power Consumption	1.2 KW	2 KW	2 KW	3.5 KW	

EZ- II

CNC engraving & router machine - 2d/3d with closed loop motor





Hand Held Controller

Hand Held Controller allows operator to set job parameters, jog the machine, perform system test and download jobs from computer via USB cable and USB key also.



FEATURES

- > 25 MM Linear guideways for high positional accuracy and long life with high motion accuracy.
- Original HSD Italian spindle gives you very stable, trouble-free, maintenance-free performance for long period of time.
- ▶ Fast speed and high accuracy ensured by gear transmission equipped on CNC Router.
- ▶ High accuracy and heavy workload ensured by imported square rail.
- Lubrication maintenance provided by semi automatic lubrication system.
- Axis drive system: X, Y Helical Rack, Z Ball Screw.
- Working table is covered with rigid PVC sheet for long life aluminum T slot table.

SPECIFICATION

Lubrication System



Model	EZ-1325-II
Outer Dimensions	2150 x 3300 x 1700
Working Area (X, Y, Z)	1300 x 2500 x 200 mm
Spindle	6 KW Air Cooled, HSD Italian Spindle
Spindle Speed	18000 RPM
Distance Between Bed & Gantry	200 mm
Maximum Traveling Speed	25 mtr/min
Cutting Tool Diameter	03 to 16 mm
Repeated Location	0.025 mm
Operating System	DSP-Hand Held Controller
Driving System	Closed Loop Motor
Power Supply	AC 420V / 3PH
Weight	970 Kg.

Specification are liable to change without prior notice. Note: AC420V power supply will be applicable for 6KW spindle.

EZ- II

CNC engraving & router machine - 2d/3d with closed loop motor



SPECIFICATION

Lubrication System)



Model	EZ-II-1325
Outer Dimensions	2150 x 3300 x 1700
Working Area (X, Y, Z)	1300 x 2500 x 200 mm
Spindle	6 KW Air Cooled, HSD Italian Spindle
Spindle Speed	18000 RPM
Distance Between Bed & Gantry	200 mm
Maximum Traveling Speed	25 mtr/min
Cutting Tool Diameter	03 to 16 mm
Repeated Location	0.025 mm
Operating System	DSP-Hand Held Controller
Driving System	Closed Loop Motor
Power Supply	AC 420V / 3PH
Weight (approx.)	970 Kg.

 $Specification\ are\ liable\ to\ change\ without\ prior\ notice.\ Note:\ AC420V\ power\ supply\ will\ be\ applicable\ for\ 6KW\ spindle.$



NOTES	

NOTES

NOTES	





















JHB

+27 11 314 3237

+27 11 312 5410

+27 72 163 6036

+27 60 502 1121

sales-amari@amaritrading.co.za

Unit 14, Alphen Squre North, Cnr George & 16th Road, Midrand, South Africa -1685

https://www.amaritrading.co.za/