




AMARI



Who is Amari?

Amari General Trading currently offers products such as flooring, wall and facade cladding, aluminium composite panels and general building materials for offices, shops, factories, porta cabins, auditoriums and schools.

Our success stems from the age old tradition of belief, hard work and listening to our trade partners and customers' needs.

Amari Trading's range of products is gaining popularity thanks to its reasonable price point. "Our products have been well received and rolled out to the EST buying group, Powerbuild, Shereno Printers, Crown Hardware, Golf Cart, to name but a few customers. They have also been used in residential homes, offices, prefabricated housing solutions, luxury mobile toilets, container offices, spray booths, etc," says Ashok Jain, director of Amari General Trading. LCD Wall unit, Designer Walls, Storage units, and many other Interior decor applications.

TABLE OF CONTENTS

05	PVC Vinyl Flooring
06	Antique
07	Braavo
08	Challenger
09	Duratek
10	Hi-Tech
11	Krayons
12	Luxuria
13	Matrix/Embossed
14	Ornate
15	Transport/Safety
16	Robust
17	Siggma
20	D-Stona Walls
22	D-Stona Laminates
23	Lift Jamb
23	Pillar
24	Mouldings
25	Aluminium Composite PVC
25	Panel Composite
26	PVC Foam Board
27	Polycarbonate Sheets
29	Wall & Ceiling Fluted Panels
47	AUTOMATIC Bending Machine

PVC Vinyl Flooring

Vinyl roll is a multi-layer vinyl with a printed top layer. It comes in large, continuous, flexible sheets, and there are usually very few if any seams when installed. Vinyl roll is therefore usually recommended in areas subject to moisture, such as the bathroom, kitchen and laundry.

Modern vinyl roll is a durable, practical and affordable flooring option that also offers an extraordinary choice of designs: from brilliant colours, playful abstracts and black and white, to perfect reproductions of natural materials such as wood and stone.

LVT (luxury vinyl tile)

LVT, which stands for luxury vinyl tile, is a multi-layered, waterproof, resilient flooring available in either rigid or flexible vinyl tiles or planks. Similar to vinyl roll, LVT is a durable and practical flooring option that also offers a wide choice of designs and styles, from timeless and classic to trendy designs.



Antique

Antique is an ideal flooring for residential and semi commercial applications. Available in thickness of 1.50 MM, Antique bornes a high strength wear layer which makes it resistant to heavy foot fall and ensures that the flooring has a long life. It is available in wooden designs and wooden embossing's which provide a seamless natural wood look and help replicate the beauty. This premium range of flooring also provides a decent level of sound and heat insulation.


Salient Features

- It is designed to withstand high wear and tear resistance due to a high strength wear layer.

- Available in wood designs and Natural wooden surface textures

DIMENSIONS AVAILABLE	
Thickness	1.50 mm
Roll Width	1.50 mtr, 2.00 mtr
Roll Length	20 mtr

Shades

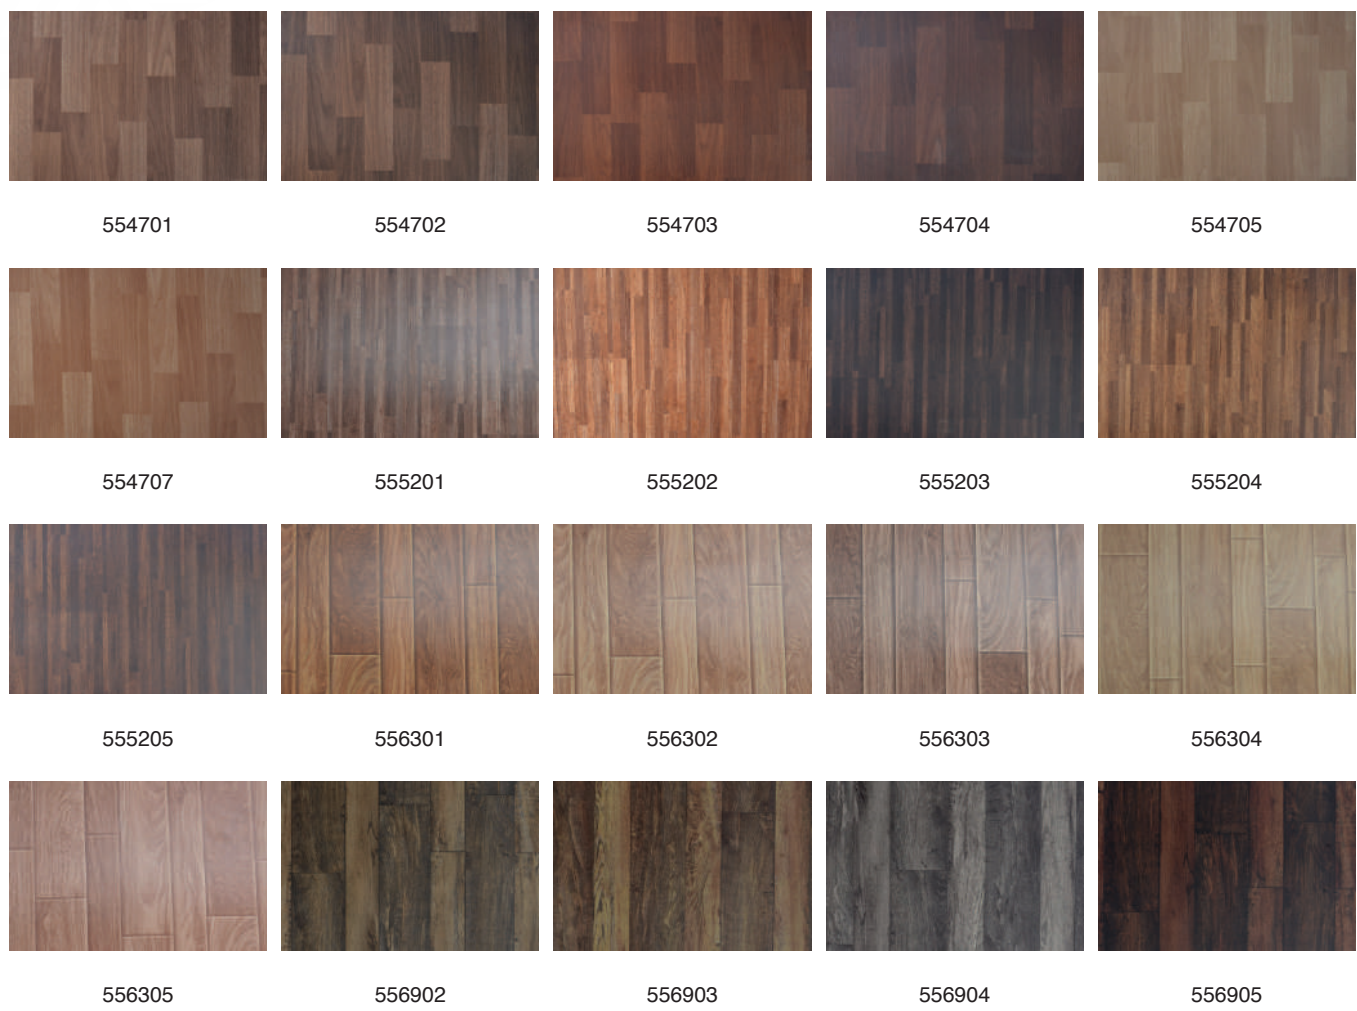

Braavo

Braavo is a premium sports flooring with cushion backing designed keeping in mind the modern-day requirement of a floor that is heavy duty but soft enough for a comfortable and jerk free workout in a gym, sports court or a fitness/wellness centre.

The highly resilient wear layer is produced using speciality resins that take care of the heavy abrasion loads. The ‘Impregnated Glass Fibre Tissue” reinforcement provides a very high dimensional stability and lay-flat properties to the product in any weather conditions. The surface is specially treated with PUR surface treatment for a neat & clean surface and easy maintenance. The densely compacted cushioned base layer absorbs the jerks and also adds to the acoustical property of the floor. Recommended application areas are Gymnasiums, Table tennis Courts, Badminton courts, Fitness & yoga centers. Since the flooring is available in plain colours & wooden designs as well and due to its acoustical properties, these floorings are also suitable for Auditoriums, Libraries and in Schools as well. The cushioned floor also makes it a safe floor as it saves children or adults from injuries due to a fall.

Salient Features

- Specially formulated high abrasion resistant wear layer which makes it “T ‘ rated.
- Superior shock-absorbing cushion base layer.
- These floorings are Glass Fiber Tissue (GFT) reinforced for lay flat, low shrinkage, dimensional stability & strength.
- The product is suitable for medium to heavy traffic areas.
- PUR (Polyurethane) surface treatment enables easy cleaning, scratches resistance & dirt accumulation and also ensures quick cleaning/ mopping.
- Braavo flooring is recommended for indoor use only.

Shades



AR-51 AR-53 AR-54



AR-55 AR-56 AR-57



Bravo Blue Bravo Green Bravo Iron Grey



Bravo Orange Bravo Red Bravo Silver



Bravo Yellow 85A 86



Elite Blue Elite Green Elite Grey



Elite Orange Red

Challenger


Challenger is economically priced, multi-application floorings having a simple two colour directional marble pattern. These are most suitable for offices, Porta Cabins, stores, schools or areas where low-cost products are required but the performance of heavy-duty flooring is required. These floorings are very popular with the Porta Cabin manufacturers or with the Government contractors as these buyers are price sensitive and require a product meeting specifications at a very reasonable cost. Application areas for these floorings are in Porta Cabins, Offices, Shops, Air Conditioned factories, 2 & 3-star hotel industry, etc.

Salient Features


- Attractive shades.
- Fully Flexible & durable
- PUR coating can also be done against specific order.
- Application areas offices, stores, schools, Porta Cabins, Pre-fabricated building industry, low cost housing, etc.

DIMENSIONS AVAILABLE	
Thickness	from 1.50 mm to 3.00 mm
Roll Width	1.50 mtr, 2.00 mtr
Roll Length	12 to 15 mtr

Shades

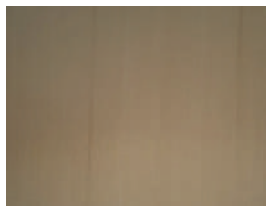


Almond Brown (4502)

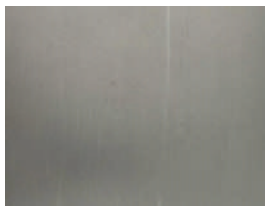

Ash Grey (4510)



Beige (4501)



Black (4508)




Carolina Blue (4512)



Durofloor Citrus Yellow
4503




Durofloor Tando Orange
4504




Light Grey (4509)




Lilly White (4511)




Marine Blue (4514)



Ocean Blue (4513)



Sea Green (4507)



Signal Red (4506)



Super Cream (4515)




Terracotta (4505)

Duratek

Duratek is a residential flooring available in a wide array of designs to match the ever changing needs of the residential segment. It is crafted keeping in mind an economical price point along with high feasibility and usability. Along with residential applications, Duratek is also well suited to be laid in offices, libraries, etc. The large range of designs ensures that all pallets are catered to.

DIMENSIONS AVAILABLE	
Thickness	1.00 mm
Roll Width	2.00 mtr
Roll Length	20 mtr

Shades

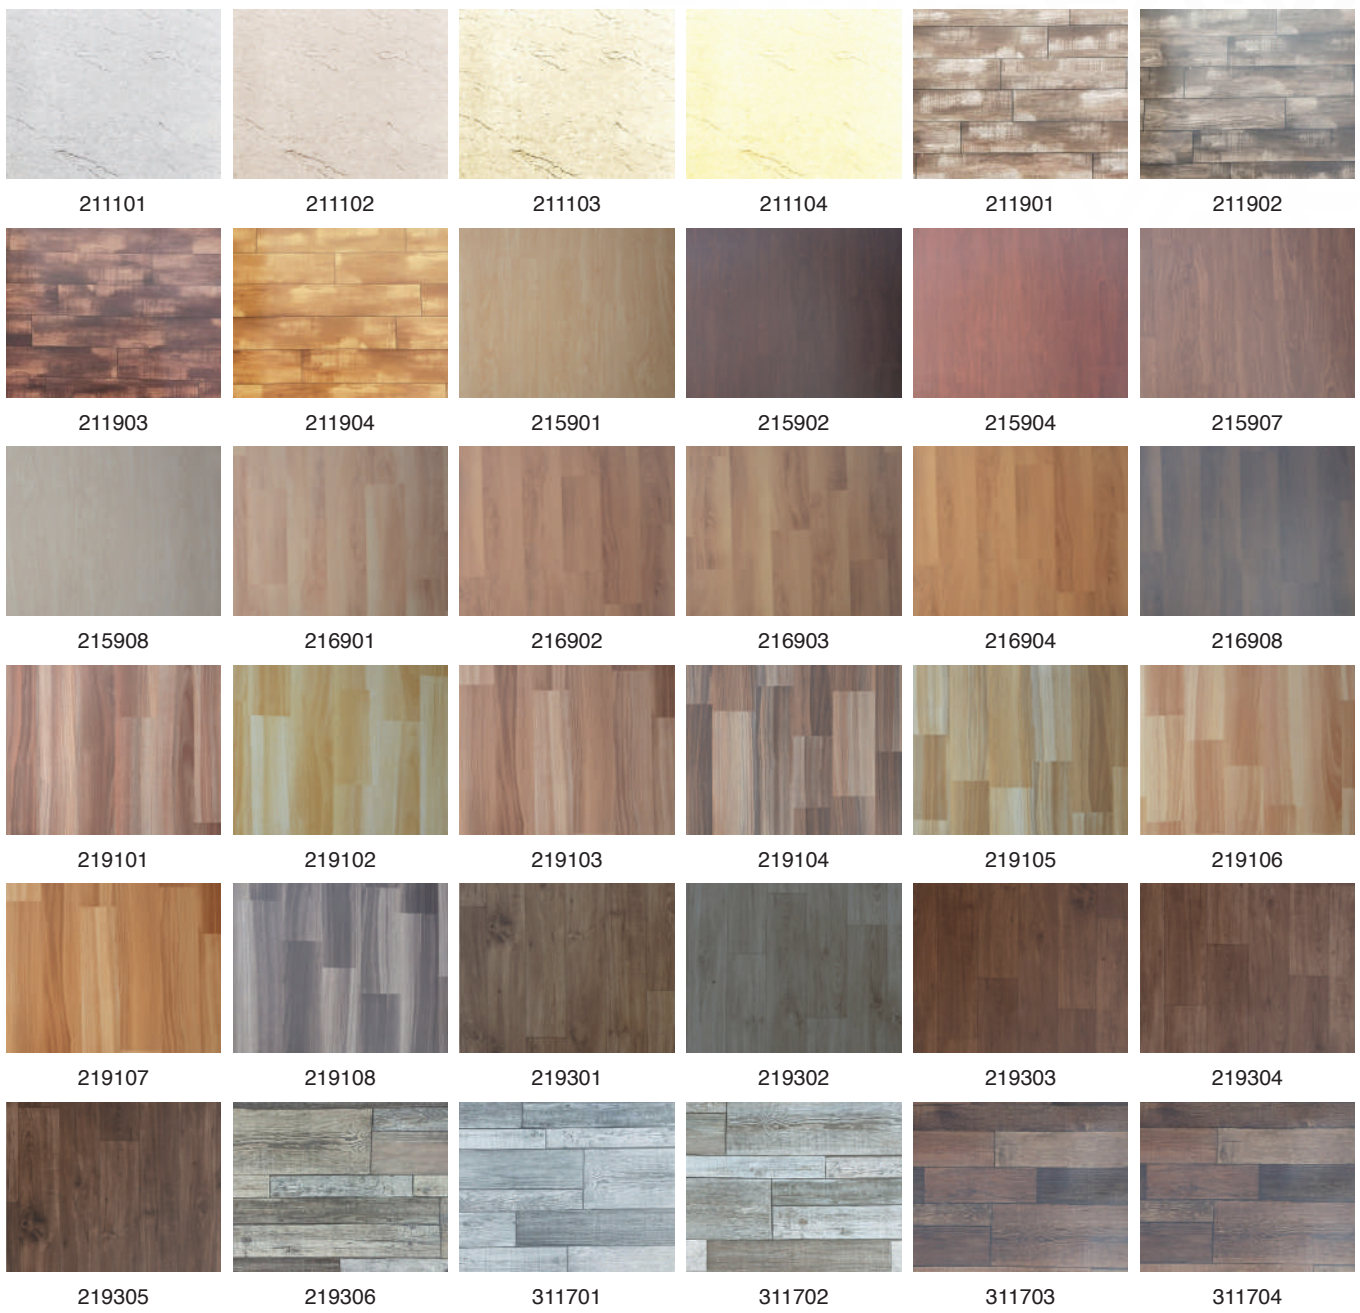

Hi-tech

Hi-tech is high quality printed vinyl flooring. The wear layer is of a thicker type as compared to thinner floorings which make it suitable for semi-commercial use. The thickness of 1.30mm also helps in hiding under floor undulations to a certain extent. The choice of patterns includes wooden, stone and marble. It is an ideal flooring for medium-sized offices having a reasonable footfall. flooring, retail flooring and home flooring.

Application areas for such floorings are mainly in small offices, residential, small hotels & shops, back offices in schools & hospitals, etc.

Salient Features

- Hitech is the collection of wooden, stone and pleasing marble designs in a host of ranges from

classic to premium designer rolls.

- This is a high quality printed floor covering, having the same colour base and a very tough top wear layer of 0.15mm.
- The perfect choice for beautifying homes, shops, offices, showrooms, residences etc.

DIMENSIONS AVAILABLE

Thickness	1.30 mm, 2.00 mm
Roll Width	2 mtr
Roll Length	20 mtr

Shades



Krayons

Krayons is from the cushion vinyl range from WONDERFLOOR. Krayons are available in a range of bright & lovely colours to add freshness, cheerfulness and joy to the interiors. Krayons is designers delight and a medium to get imaginative and creative by a mix-and-match of different shapes, sizes and colours. The product is available in roll form but can be cut into shapes & mixing & matching of various colours and designs is possible very easily due to its flexible nature. The flooring comes with Glass Fibre Tissue impregnation for dimensional stability leading to very minimal shrinkage and also has a PUR coating on the top surface to provide maintenance-free & neat and clean surface. Application Areas - It is ideal for schools, educational institutions, playgroup areas, activity areas, children rooms in homes etc. These floorings are installed in offices and the hospitality industry as they greatly enhance the environment with their vibrant colours.

Shades



Salient Features

- Lay flat properties
- Very easy to lay
- Specially formulated high abrasion resistant wear which makes it a ‘P’ rated
- Superior shock-absorbing cushion base layer.
- These floorings are Glass Fiber Tissue (GFT) reinforced for dimensional stability and strength
- The product is suitable for medium traffic areas
- The surface is PUR treated for easy maintenance.
- Highly dimensionally stable – No shrinkage at joints.

DIMENSIONS AVAILABLE

Thickness	2.00 mm, 3.00 mm
Roll Width	2.00 mtr
Roll Length	20 mtr

Luxuria

Luxuria is a superbly crafted premium range of residential flooring equipped with glass fibre tissue impregnation and a cushion base for extreme comfort while walking barefoot in homes. This range of flooring is suitable for those who are looking for stylish flooring providing elegance, comfort, style and warm interiors. It has extra cushioning for more comfort with beautiful design patterns for lifting your home interiors.


These floorings are recommended for use in residential homes and are user friendly in cold weather conditions.

- Luxuria range comprises of stone and wood designs and other contemporary themes,
- Sound absorption quality
- Extra soft, cosy and comfortable,
- Ideal for cold climate
- Excellent dimensional stability (“Glass Fibre tissue” impregnated)
- Suitable for Residential use

Salient Features

DIMENSIONS AVAILABLE	
Thickness	2.00 mm, 2.50 mm
Roll Width	2 mtr
Roll Length	20 mtr, 25 mtr

Shades

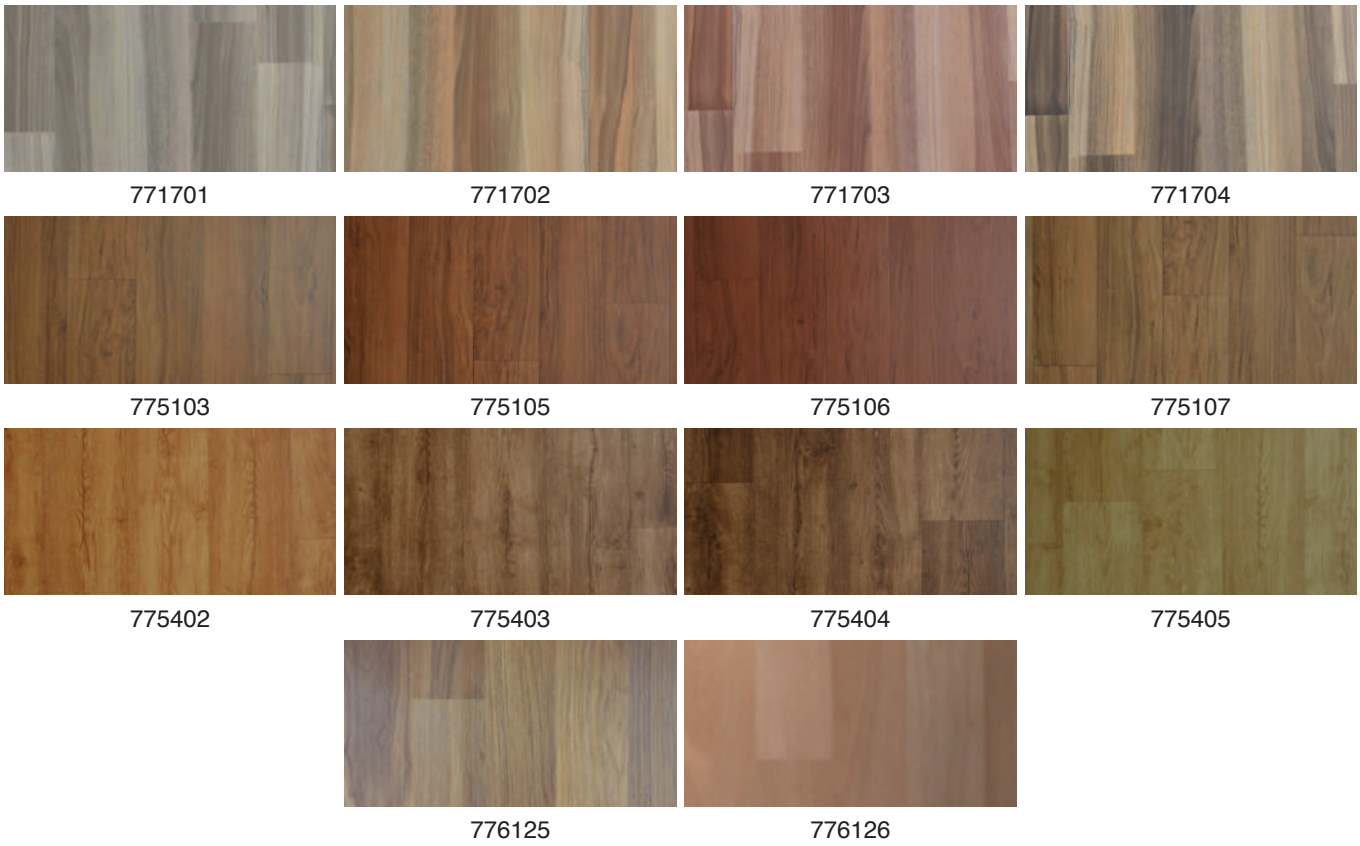

Matrix/Embossed

The Matrix Embossed Floorings has a deep embossed top surface meant to provide extra grip for safe movements. These floorings are produced in a wide range of deep embossing designs which provides anti-slip surface. These floorings are used in passenger buses as OEM equipment as they provide a slip-resistant floor. Designs like Coin, Chequer Plate, Dew Drops, Hexagon, Diamond etc. are very popular & provide a neat geometrical pattern on the floor.






Application Areas – Ramps, Wet areas in Hospitals, Fitness centres, Buses & trains, etc.

Salient Features

- Available in Solid colours with either Homogeneous type or heterogeneous type in various embossing on the top layer in pleasing metallic colours like Aluminum, Copper, Gold, etc or solid colours like Black, Red, Yellow, etc.
- They are ‘M’ or ‘P’ rated depending upon the thickness and have a slip resistance of R10.
- Can be produced with Low Fire & Smoke properties for Buses & trains.
- The product is suitable for sale in Europe and fire safety approvals have been obtained from European labs.
- Custom colours can be produced as per the customer’s preference.

DIMENSIONS AVAILABLE	
Thickness	2.00 mm, 3.00 mm
Roll Width	2.00 mtr
Roll Length	20 mtr

Shades

				
Embossing Design No. 147	Embossing Design No. 160	Embossing Design No. 195	Embossing Design No. 216	Embossing Design No. 220
				
Embossing Design No. 250	Embossing Design No. 253	Embossing Design No. 254	Embossing Design No. 255	Embossing Design No. 256
				
Embossing Design No. 259	Embossing Design No. 407	Embossing Design No. 468	Embossing Design No. 475	Embossing Design No. 478
				
Embossing Design No. 480	Embossing Design No. 484	Embossing Design No. 485	Embossing Design No. 499	Embossing Design No. 608

Ornate

Ornate is available in natural wood and stone designs. The classy wooden and stone surface textures further add to the natural look and aesthetic of the flooring. These floorings are having Glass Fibre Tissue impregnation and PUR surface treatment which enable minimum maintenance & long service life. The hard-wearing clear transparent wear layer makes it suitable for residential and semi-commercial applications like offices, schools, libraries, restaurants, clubhouses, clinics, stores & hotel rooms, etc. The top surface is PUR protected for ease in maintenance and offer above-average resistance to scratch and stains.


Salient Features

- Lay flat properties
- Compact cushion bottom suitable for semi-commercial Areas.

- PUR (Polyurethane) surface treatment enables easy cleaning, scratches resistance & dirt
- Accumulation and also ensures quick cleaning/ mopping.
- Natural like wooden and stone surface texture and available in vibrant colours.
- High dimensional stability – No shrinkage at joints.
- Application areas: Home, Offices, Light Commercial Areas etc.

DIMENSIONS AVAILABLE	
Thickness	1.6 mm
Roll Width	2.00 mtr
Roll Length	20 mtr

Shades

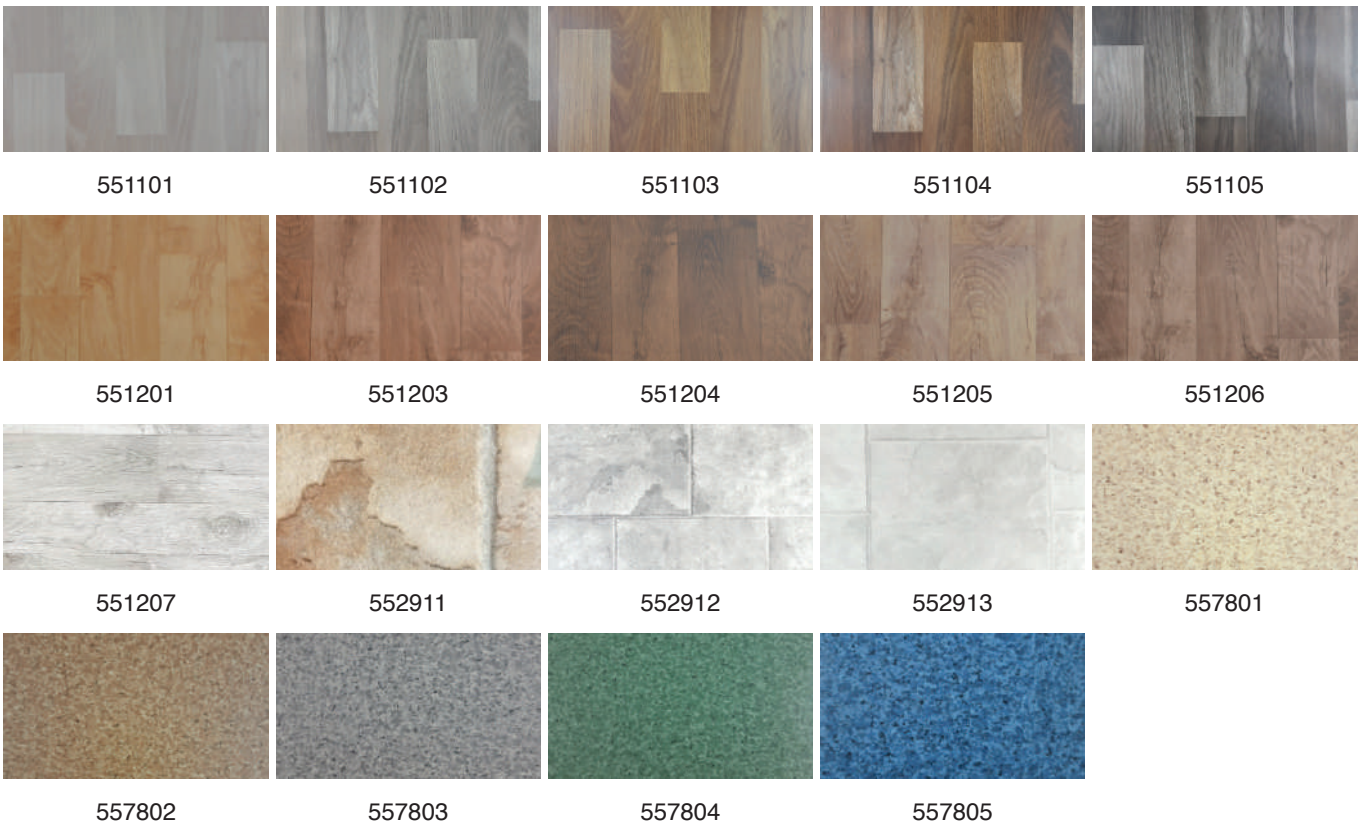

Transport/Safety


These are special floor coverings embedded with Silicon Carbide (Corundum) grains on the top surface which provide a very high slip resistance rating. Due to a superior PVC content and Silicon Carbide Grains, these floorings can withstand very high abrasion and are most suitable for areas where there is heavy footfall & anti-slip properties are required like: Buses, Trains, Ramps, Wet Areas, etc. These floorings are also produced with special additives to meet stringent Fire & Smoke properties prevalent for use in Buses & Railway coaches. For aesthetic properties, these floorings are also embedded with multi-colored Polymer chips in contrast colors giving it a look of a Non Directional flooring in Mosaic pattern TRACTION safety floorings are normally produced with a smooth A surface finish, however for enhanced slip resistance they are produced with an embossed surface finish from our “Matrix” range.

Salient Features

- The produced as per ISO requirements and with Fire & Smoke emission requirements which are most important for the transport industry.
- Product is “T “ rated due to its high abrasion resistance properties.
- Available in plain colors or with multi-colored chips
- Also Available with Glass Scrim Reinforcement for very high Dimensional Stability.
- Suitable for the transport sector like Buses, Trains, Lifts, Loading Ramps, Walkways, Wet Areas, etc.

DIMENSIONS AVAILABLE	
Thickness	1.50mm to 3mm
Roll Width	2.00 mtr
Roll Length	15mtr

Shades

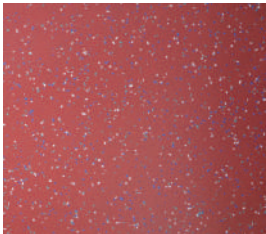

Crimson Red




EC Grey




N.BLUE




S. R. Beige



Sandy Brown




Satabdi Blue



SPARKLE BLUE



Sparkle Grey



Sparkle Red



SPARKLE YELLOW

Robust

Robust is a heavy-duty, fully flexible marbled PVC floor covering of high quality.

This product has a unique 2 colour marbling pattern all over the thickness and is extremely pleasing to the eyes and the décor. Robust adds to the aesthetics of the area where it is installed, as it is produced with one base colour and 2 contrast colours for marbling effect by a special hot granulation process which is unique. These floorings, in thickness 1.50mm & above, are also having PUR surface treatment for easy maintenance and very long service life.

These floorings are suitable for use in Offices, Airconditioned factories, the Healthcare industry, Auditoriums & Libraries, Shops & showrooms and Schools & Colleges as they are available up to 3.00mm in thickness.

Salient Features

- They are ‘P’ rated and have a slip resistance of R9.

Shades



- The floorings are embossed with a “Raindrop” embossing design which enables quick cleaning & easy maintenance.
- Robust is available with PUR (Polyurethane) surface protection providing resistance against scratches & dirt accumulation and also ensuring quick cleaning/ mopping.
- Robust is most suitable for Offices, Shops, Factories, Porta Cabins, Auditoriums, schools, libraries, healthcare etc.

DIMENSIONS AVAILABLE

Thickness	1.0 mm to 3.0 mm
Roll Width	1.50 mtr, 2.0 mtr
Roll Length	12 mtr to 20 mtr

Sigma

A specialized homogeneous flooring designed for the healthcare/pharma industry keeping in mind the heavy footfalls, trolley movements. Sigma PVC flooring is surface treated with Polyurethane (PUR), to provide above-average resistance to scratches, scuff marks, stains, dirt accumulation to ensure easy cleaning and mopping. SIGGMA is available in rolls of 1.50mtr width and can be supplied in tile as well. These floorings are most suitable for Hospitals & Clinics but due to their aesthetic look & appearance in pastel shades and suitable for heavy-duty use, these floorings are installed in offices, airconditioned factories & Pharma units, Shops & showrooms, Offices and in Auditoriums & Libraries.

Salient Features

- Homogeneous, hard-wearing, smooth top finish for easy cleaning
- The random marbled patterns in pastel shades are pleasing to the eyes.
- Advanced Antibacterial/ fungicidal properties best suitable for the healthcare industry.

Shades



- The Product meets fire & smoke requirements as per EN Standards and is approved by ARAI, India.
- Heavy Duty “T” rated flooring suitable for heavy traffic areas & movement of wheelchairs, wheeled stretchers, portable diagnostic equipment etc.
- Surface treated with PUR with anti-dirt, which minimizes scratches, scuff marks, stains and maintenance.
- The flooring joints can be made seamless by way of thermal welding using the recommended welding cords & equipment. Custom colours can be produced as per the customer’s preference.

DIMENSIONS AVAILABLE	
Thickness	1.50 mm to 3.00 mm
Roll Width	2.00 mtr
Roll Length	20 mtr





D-STONA

D-Stona is a revolutionary product engineered to transform your building's interiors to a new level of luxury.

It is a high quality engineered marble with limestone as the major component.

It is available as flat sheet or beautiful mouldings in various marble as well as wooden textures. With its diverse range D-Stona is sure to add a whole new dimension to interior decoration !


DIMENSIONS:

- 2.5 mm & 1,25 mm thickness
- 1220x2440 length and width




D-STONA

SIGNATURE WALLS




STATUARIO




BLACK MARQUINA



BOTTOCHINO




BROWN EMPRAADOR




CREMA ZAFRA




RED ONYX




JAISALMER RED



GOLDEN EMPRAADOR



GOLD VEIN



BLACK EMPRAADOR



SILVER TRAVERTINE




ONYX TROPICAL



SMOKED DARK OAK



SMOKED MAPLE



AZALEA BLACK







BEIGE TRAVERTINE



SILVER PORTORO



GOLDEN PORTORO


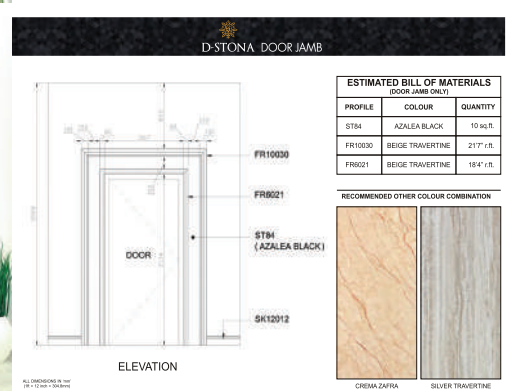
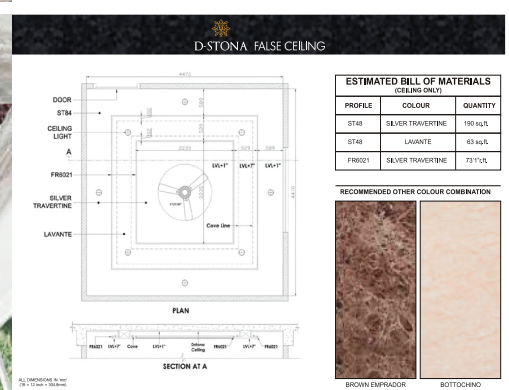
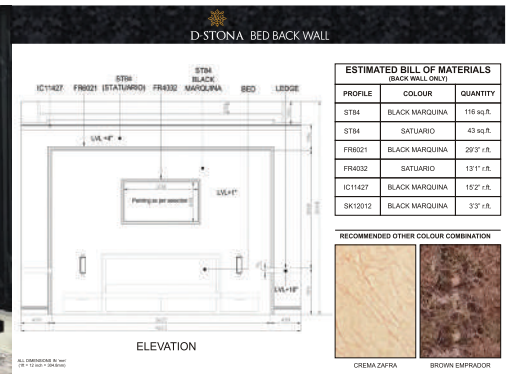
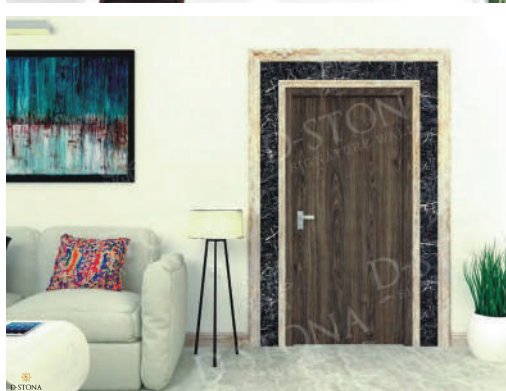


NOTE: AVAILABLE IN MATT AND GLOSS SURFACE FINISH



D-STONA

SIGNATURE WALLS

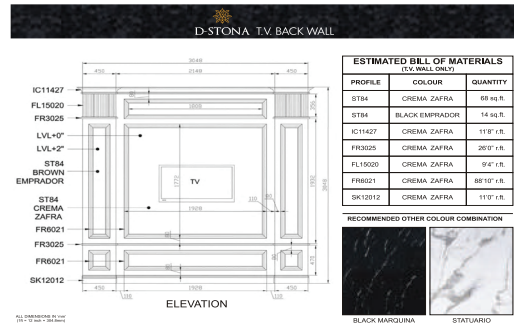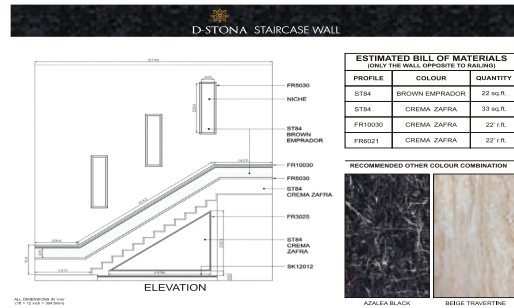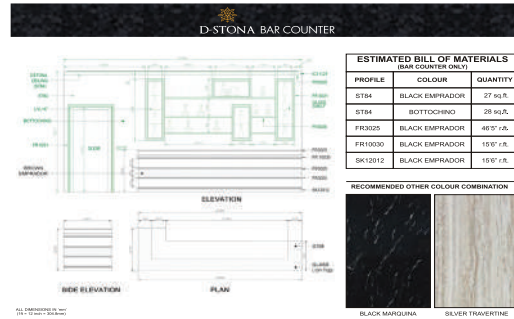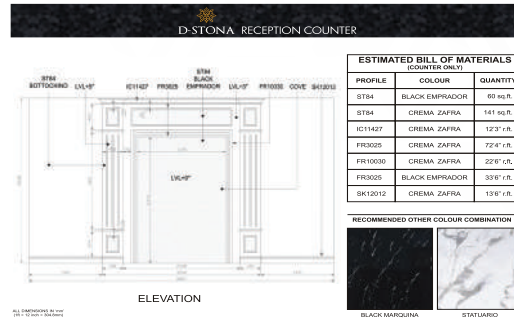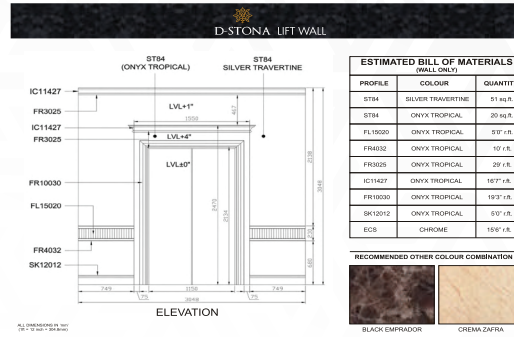

DURABLE & LONG LASTING



TERMITE PROOF



QUICK INSTALLATION



FIRE RETARDANT



ENVIRONMENT FRIENDLY & RECYCLABLE



WATER PROOF

D-Stona Laminates

Revamping your home can be difficult sometimes. Considering PVC laminates for your modular laminates for kitchen, wardrobe, or furniture may be a good option if you are looking for the ultimate decorative finish. In addition, their versatility and durability make them popular for usage in house interiors, providing a fashionable touch.


What is PVC laminate?

PVC laminate is a sheet of material created by fusing decorative paper and plastic resins in the shape of sheets. They are available in various finishes, including matte, glossy, textured, high gloss, and various patterns and plain colours. Laminates are glued on MDF or plywood and completed by edge banding the edges of the panels on both sides. While high gloss laminates have a similar look to acrylic, they are not the same material.

PVC laminate are flexible laminate sheets that can be stretched around the edges up to 90 degrees, removing their requirement. In addition, because they are resistant to corrosion, termites, heat, and water, PVC is an excellent choice for kitchen cabinets and countertops, among other things.




LIFT JAMB

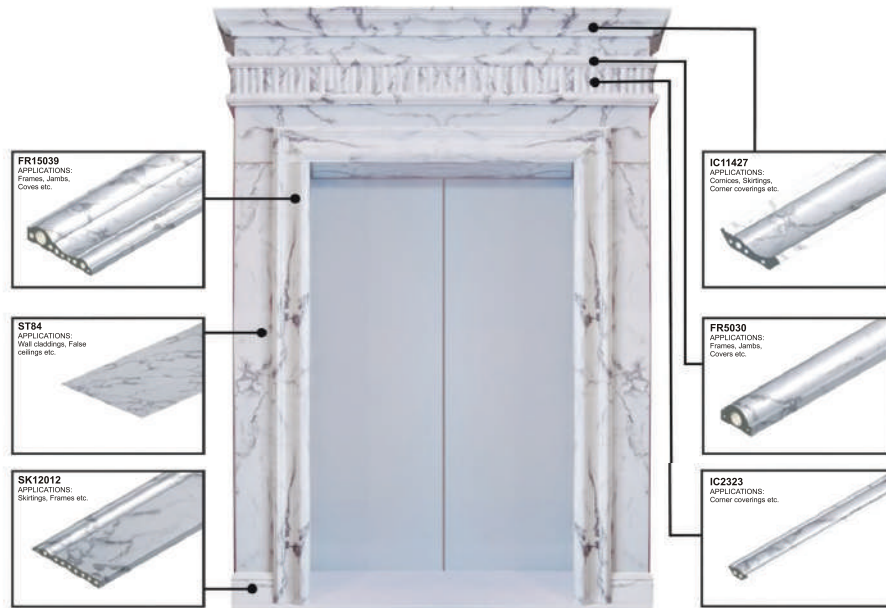

PILLAR



SHEET & ACCESSORIES

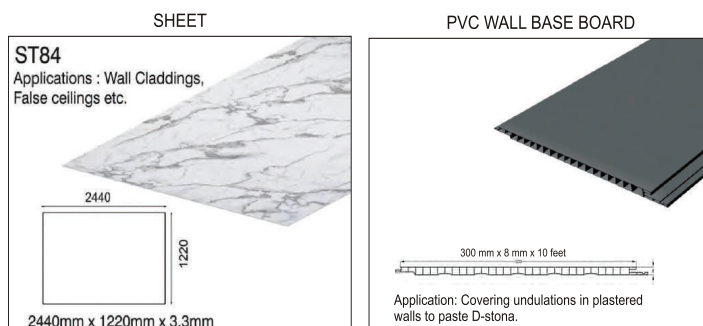

MOULDINGS



D-STONA
SIGNATURE WALLS

FR3025

Applications : Frames, Jambs, Coves etc.




30mm x 25mm x 2900mm

With wide range of applications, D-stona is sure to add elegance to your interiors by giving it a touch of class, its beautiful mouldings and metal sections give the perfect look for walls and a wide range of furniture.

FR6021


Applications : Frames, Jambs, Coves etc.



60mm x 21mm x 2900mm

FR15039


Applications : Frames, Jambs, Coves etc.



150mm x 39mm x 2900mm

ED5032


Applications : Frames, Jambs, Coves etc.



50mm x 32mm x 2900mm

FR5030


Applications : Frames, Jambs, Coves etc.



50mm x 30mm x 2900mm

FI15020

Applications : Pillar claddings, wall claddings etc.



150mm x 20mm x 2900mm

IC2323


Applications : Corner Covering etc.



23mm x 23mm x 2900mm

FR10030


Applications : Frames, Jambs, Coves etc.



100mm x 30mm x 2900mm

SK12012


Applications : Skirting Frames etc.



120mm x 12mm x 2900mm

IC11427

Applications : Cornices, Skirtings, Corner coverings etc.



50mm x 30mm x 2900mm

INSTALLATION PROCESS

Dstona fabrication requires almost the same tools that are used for wood fabrication. It can be cut into required sizes using a mitre saw or a hand cutter and for final adjustments a planer knife can be used over the edges. Compared to many traditional products, Dstona is hassle free to install and requires no polishing or maintenance. Generally pasted on our 'PVC wall base boards' using structural silicone adhesives, It can also be pasted over cement and wood surfaces. And with our metal section accessories, Dstona sheets can be quickly fixed using just screws, saving cost on both labour and adhesive.



Molding cutting using a miter saw.



Molding joint surface planing using a planer knife.



Molding pasting using adhesive.



Joint in moldings.




Sheet cutting using a hand cutter.



Sheet pasting using adhesive.


TSP

APPLICATIONS:
Covering ST84
(Sheet) Joint



USS


APPLICATIONS:
ST84 (Sheet) fixing
and covering edges

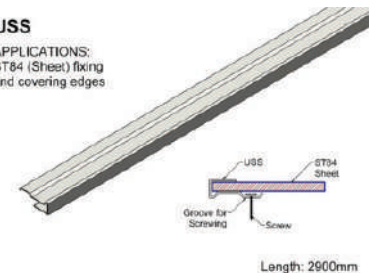


ALUMINIUM COMPOSITE PANEL

ACPs/ACM are commonly used for building cladding, Insulation and for Signage. They are light in weight, rigid and high in strength. ACP can be produced in metallic, nonmetallic colours as well as mirror finish.

- 2mm LITE Grade for backing boards and flat cut-out signs. Cost effective replacement for Chromadek sheets.
- 3mm Signage Grade in Standard colors & Corporate Colours
- 4mm Construction Grade for building cladding and heavy-duty Pylon signs

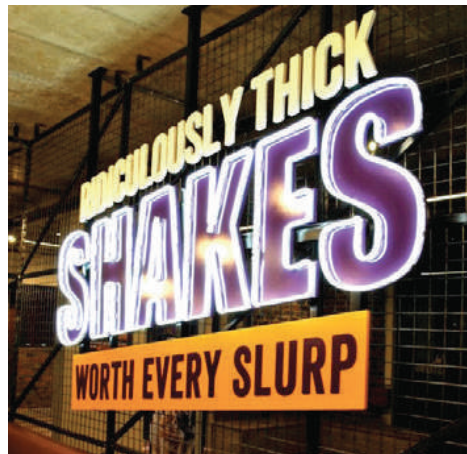

PANEL COMPOSITE

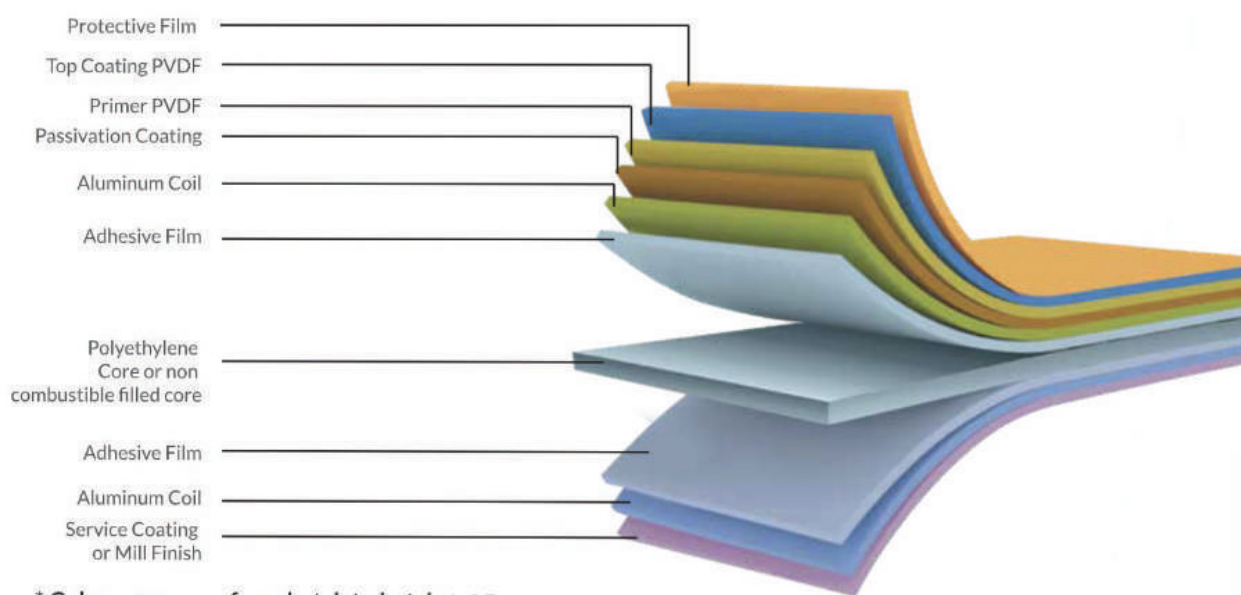

* Colour may vary from batch to batch Δ E 5

PVC FOAM BOARD

PVC Foam Board or OCT-Foam board is a rigid, light weight extruded sheet with a fine & homogeneous closed cell structure that has a smooth matte surface finish on both sides although the surface is relatively hard and scratch resistant. PVC foam board has very low moisture absorption and the mixture of Polyvinyl chloride and pleurae has good bond strength. PVC foam takes solid shape due to its linear structure. PVC foam board can be cut as easily as wood, softened and shaped by immersing in boiling water or with a standard heat gun, and painted with standard automobile paints.

PVC foam sheets provide a low maintenance solution for walls, floors and ceilings where hygiene is a priority. Oct-Foam Board can replace plywood in light concrete form work. Due to its water resistant qualities it can be used more than once and gives the concrete a smooth finish with no need for further finishing. The PVC Board is environmentally friendly and resistant to chemicals and corrosion making it a more suitable and profitable choice when it comes to concrete form work.

PVC FOAM BOARD APPLICATIONS

Furniture: Bathroom and Kitchen cabinet, Desks and shelving as well as storage cabinets in high humidity zones.

Available: 2mm - 24mm

Building Sector: Partition walls, shop fittings, interior decorating, ceiling and wall cladding as well as concrete form work.

Advertising: Signs and billboards, screen printing and exhibition stands.

ADVANTAGES OF USING PVC FOAM BOARD


- Moisture resistant.
- Light weight but strong.
- UV and weather resistant.
- Flame retardant.
- Chemical resistant.
- Easy to use.



POLYCARBONATE SHEETS

EURO-LITE® is an insulated roofing, cladding and glazing substrate, manufactured from damage resistar polycarbonate with added co-extruded long life protection against UV weathering. It weighs half the weight of plate glass, making handling and installation ultimately more convenient. It lets the light in while keeping the heat out for maximum comfort. Our polycarbonate multiwall features 10 year warranty including superior performance against loss of light transmission.

Polycarbonate sheets are transparent or opaque but can withstand far more extreme temperatures than other materials like glass or fibreglass. It can tolerate see-saw temperature swings from -40C to +120C while remaining durable as ever!

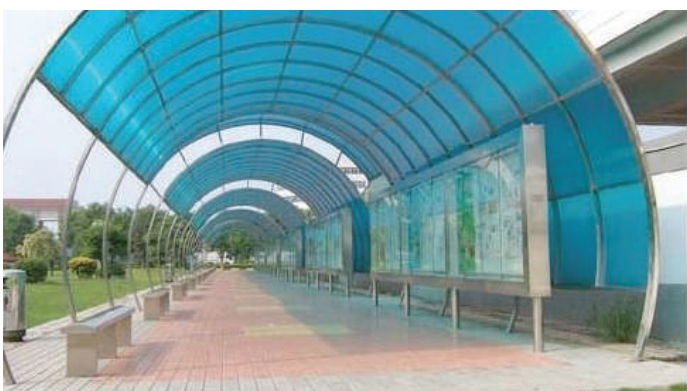

It can be applied to an outside terrace, braai area roof covering or used simply for partitioning walls and sky-lighting in roofing/awning systems; the benefits of using this material are enormous.



Thickness & Size

6mm 2100mm x 5800mm

Colours available

Clear and Bronze (Brown)



WALL & CEILING FLUTED PANELS

Amari General Trading currently offers A fluted wall panel is made of engineered wood fibers with Polyethylene densities. As a product of wood fibers, it typically imitates the look of natural wood and usually comes in wooden finish. However, with a combination of polystyrene materials, Fluted Wall panel is resistant to mold, water and Termite.

WALL & CEILING FLUTED PANELS



F12150

F18150

F20150








F20152

F24152

F18200

F10300


F10300 4G



Section F18200



Standard Length - 10 Feet
Thickness - 18 mm
Width -200 mm



Shade - R 110 FM




Standard Length - 10 Feet
Thickness - 18 mm
Width -200 mm

*Actual shade may vary from the image shown in this brochure

Section F10300 4G



Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm

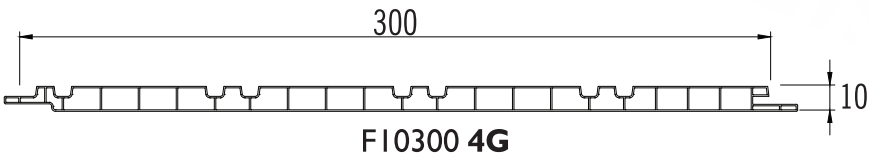


*Actual shade may vary from the image shown in this brochure

Shade - R 108 CC




Standard Length - 10 Feet
Thickness - 18 mm
Width -200 mm


Section F10300

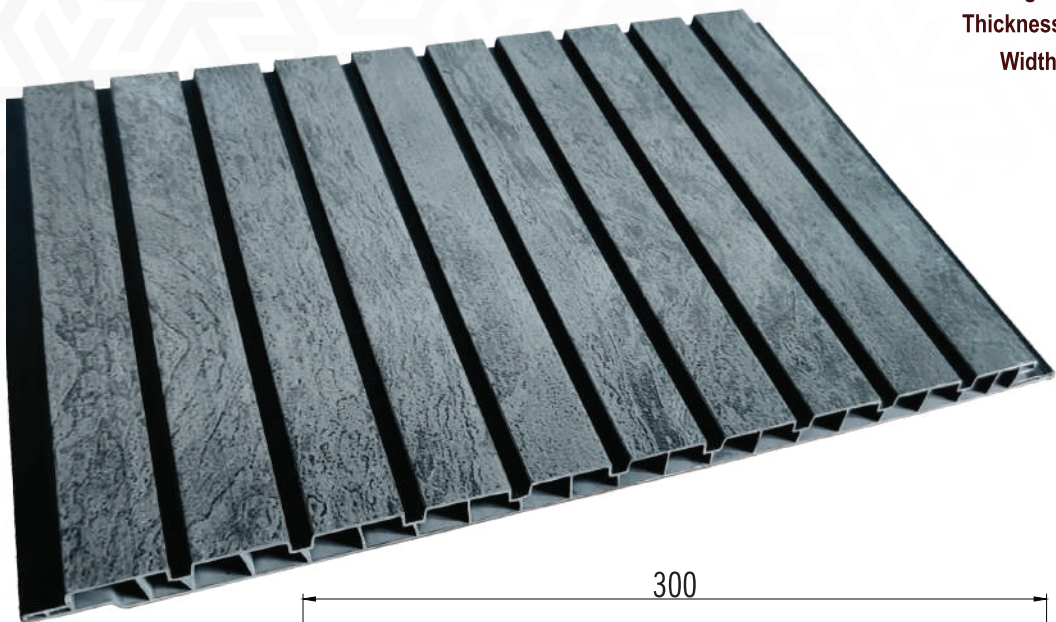

Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm



Shade - PFP 1011 CC

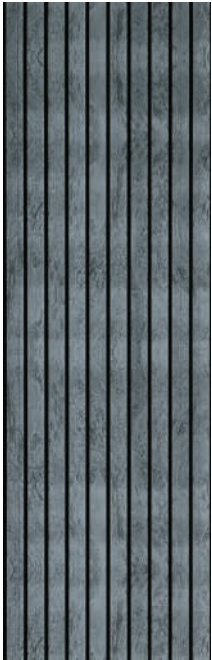

Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm


*Actual shade may vary from the image shown in this brochure

Section F10300



*Actual shade may vary from the image shown in this brochure

Shade - R 114 CC

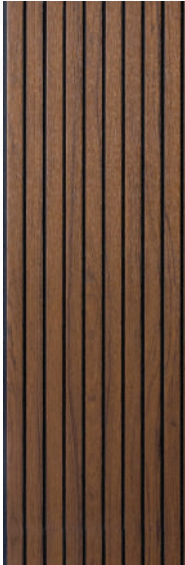


Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm



*Actual shade may vary from the image shown in this brochure

Shade - PFP 1021 CC

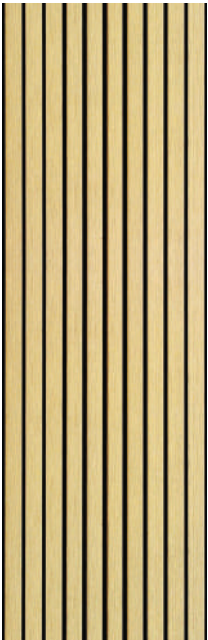

Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm

Section F10300



*Actual shade may vary from the image shown in this brochure

Shade - PFP 1027 CC




Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm



*Actual shade may vary from the image shown in this brochure

Shade - PFP 1023 CC

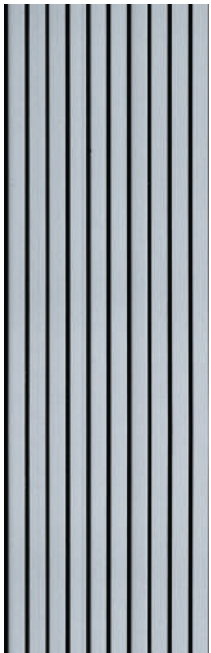


Standard Length - 10 Feet
Thickness - 10 mm
Width -300 mm

Section F20152



Standard Length - 10 Feet
Thickness - 20 mm
Width -152 mm



Actual Shade may slightly vary from the image shown here. Refer Shade card for complete shades range



**Actual shade may vary from the image shown in this brochure*

Shade - R 107 FM




Standard Length - 10 Feet
Thickness - 20 mm
Width - 152 mm

Section F20152



*Actual shade may vary from the image shown in this brochure

Shade - R 116 FM

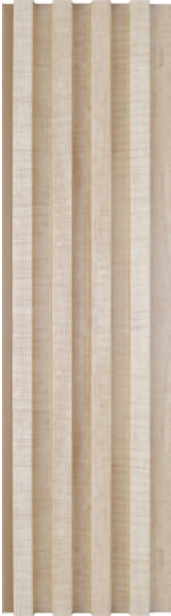


Standard Length - 10 Feet
Thickness - 20 mm
Width - 152 mm



*Actual shade may vary from the image shown in this brochure

Shade - R 126 FM

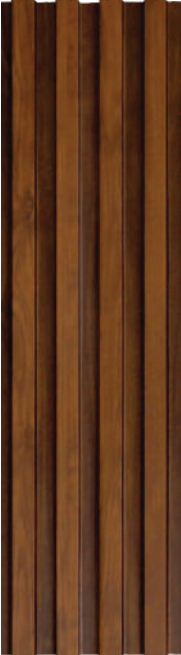


Standard Length - 10 Feet
Thickness - 20 mm
Width - 152 mm

Section F20152




*Actual shade may vary from the image shown in this brochure


Shade - Supermatt 6 FA

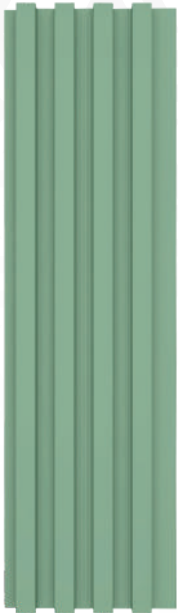

Standard Length - 10 Feet
Thickness - 20 mm
Width - 152 mm

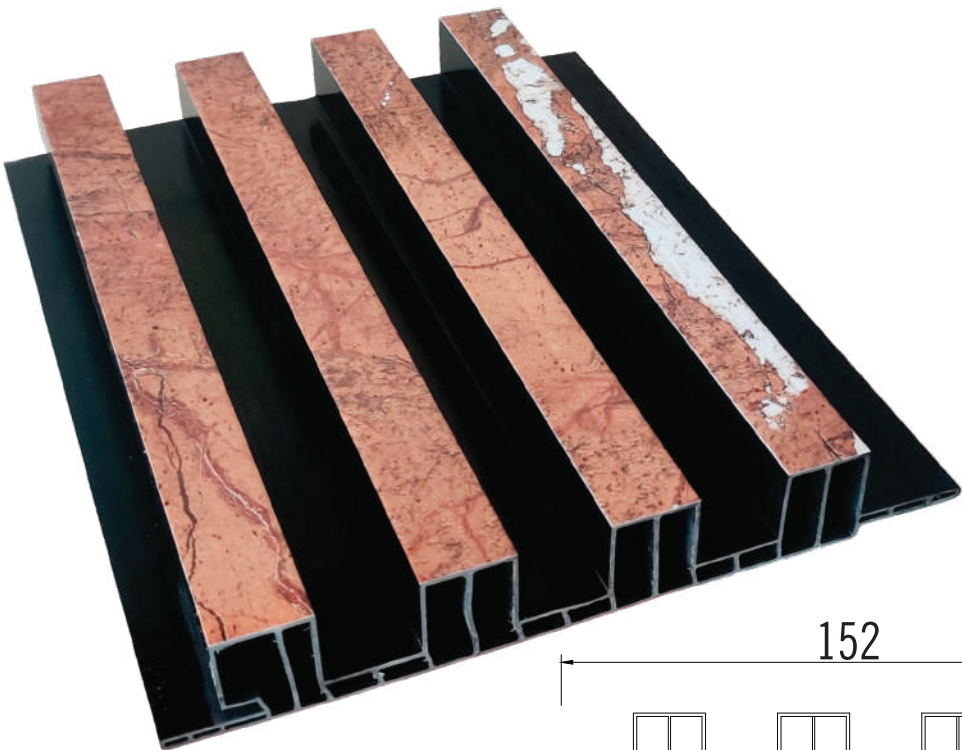

Standard Length - 10 Feet
Thickness - 24 mm
Width - 152 mm

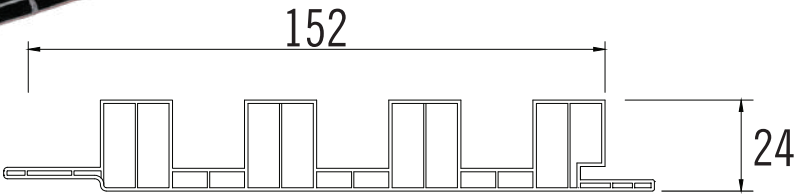

Section F24152



*Actual shade may vary from the image shown in this brochure

Shade - Marble 13 CC



Standard Length - 10 Feet
Thickness - 24 mm
Width - 152 mm



*Actual shade may vary from the image shown in this brochure

Shade - Marble 17 CC



Standard Length - 10 Feet
Thickness - 24 mm
Width - 152 mm

Section F12150



*Actual shade may vary from the image shown in this brochure


Shade - R 112 CC



Standard Length - 10 Feet
Thickness - 24 mm
Width - 152 mm



Standard Length - 10 Feet
Thickness - 12 mm
Width - 150 mm

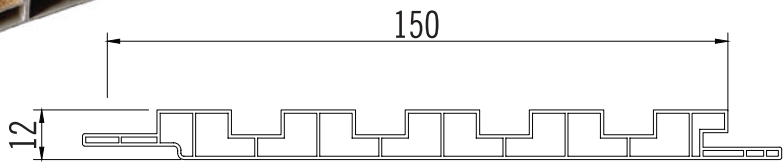

Section F12150

Shade - R 117 FM



*Actual shade may vary from the image shown in this brochure

Shade - R 124 FM



*Actual shade may vary from the image shown in this brochure



Standard Length - 10 Feet
Thickness - 18 mm
Width -200 mm

Section F18150



Standard Length - 10 Feet
Thickness - 18 mm
Width -150 mm



Shade - R 110 FM



Standard Length - 10 Feet
Thickness - 18 mm
Width -150 mm


*Actual shade may vary from the image shown in this brochure

Section F18150



*Actual shade may vary from the image shown in this brochure

Shade - R 120 FM

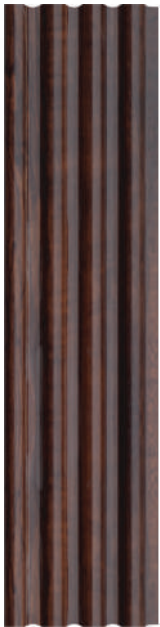


Standard Length - 10 Feet
Thickness - 18 mm
Width -150 mm




*Actual shade may vary from the image shown in this brochure

Section F20150

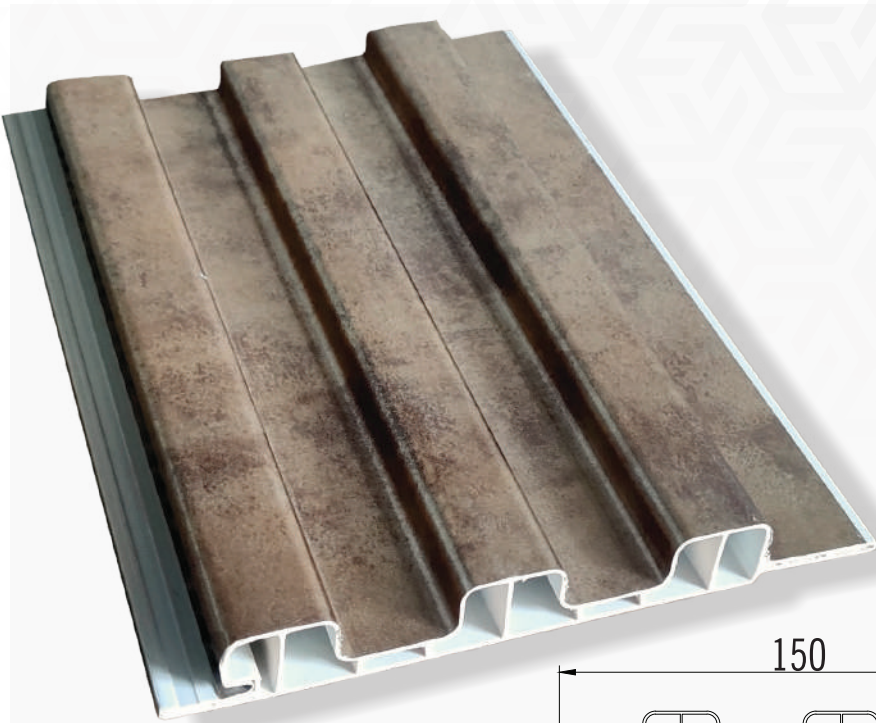

Standard Length - 10 Feet
Thickness - 20 mm
Width -150 mm

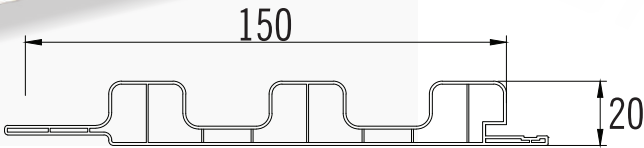

Shade - R 114 FM



Standard Length - 10 Feet
Thickness - 20 mm
Width -150 mm

*Actual shade may vary from the image shown in this brochure

Application - Section F20150



*Actual shade may vary from the image shown in this brochure

Shade - Metallic 05 FM



Standard Length - 10 Feet
Thickness - 20 mm
Width - 150 mm



Shafes - Blaze Printed Finish

Applicable for Sections - F10300, F10300 4G, F18200 & F24152





*Actual shades may vary from the images shown in this brochure.

Shades - Premium Membrane Finish

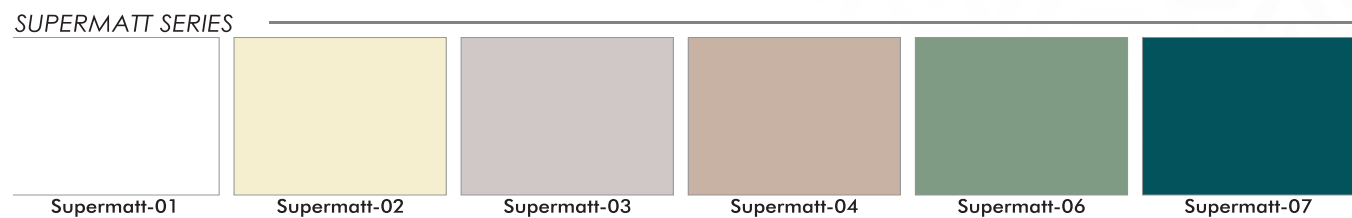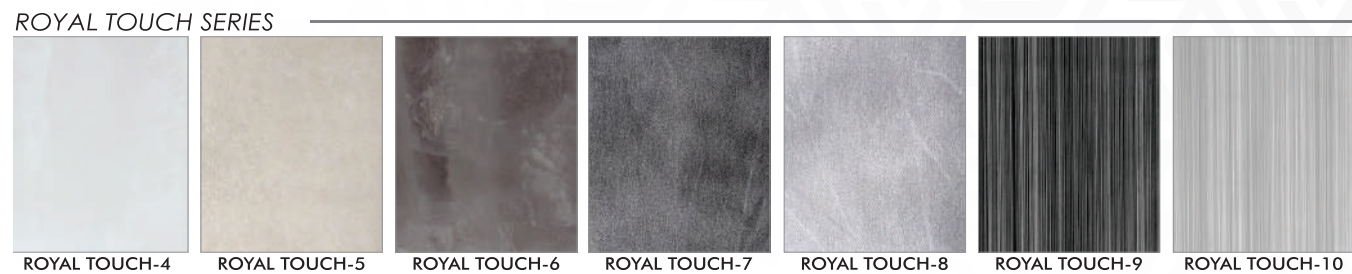

*Actual shades may vary from the images shown in this brochure. Please refer to shades details for the applicable Fluted Panel Range.

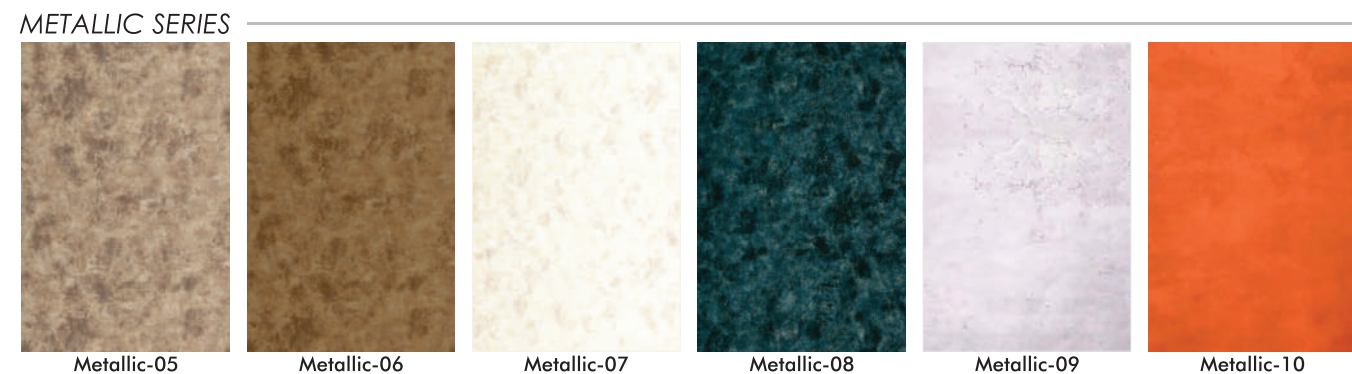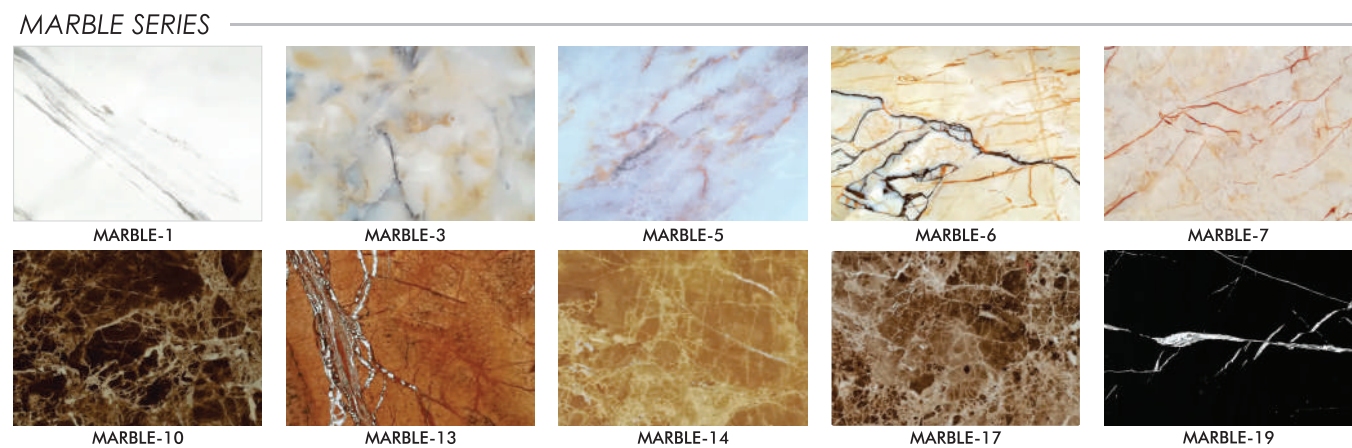

*Actual shades may vary from the images shown in this brochure. Please refer to shades details for the applicable Fluted Panel Range.

Shafes - Blaze Printed Finish

Applicable for all Fluted Sections with Charcoal Base & Full Membrane Finish



MACHINES

AUTOMATIC Bending Machine



Manual Bending Machine

Acrylic bending machine is also called plastic plate bending machine, soften and bending the plastic plate by heating.

Application Materials:
Plastic plate: Acrylic, Plexiglass
PVC, PC, ABS, PP etc.

Available Size:
Sheet Thickness 1-10mm
bending length≤650mm/≤1250mm.



Technical Specifications

Model	ZD-2400B
Heating Tube	Up and Down, 2 Tubes
Thickness	Within 15mm
Length	2400mm
Heating Gap	1-30mm
Bending Height	Within 450mm
Bending Angle	30-175 degree
Angle Setting	Manual Fine Tuning, Equipped with Electronic Angle digital display for precise angle
Scope of Application	Plexiglass (Acrylic), PC, PVC, PP, PE, PS Board and other plastic materials
Power	220V (50/60Hz)-4800w

Parameters

Model	Theory	Applicable length	Applicable Thickness	Voltage	Power	Temperature range	Packing size	Gross weight
ABM700	Thermal Forming	≤650mm	1-10mm	110V/220V	1000W	0-6000°C	1250x430 x210mm	25 KG
ABM1300	Thermal Forming	≤1250mm	1-10mm	110V/220V	1500W	0-6000°C	1910x430 x210mm	35 KG

NEW EVA II

Co2 laser engraving & cutting machine with glass laser tub.





MADE IN INDIA, A PRODUCT BY MEHTA

DLS SYSTEM (Dual Lens System)

9" LENS
for Straight Edge Cutting
Up to 20mm Acrylic

2" LENS
for Engraving and Cutting
Up to 10mm





Eva II
With Knife Shape Strips Bed
Best for Acrylic & MDF Cutting



Eva II-TX
With Honeycomb Table Bed for
Leather & Fabric, Paper Cutting




dun&bradstreet

- FEATURES**
- Linear inner sliding guide rail long life, smooth & high speed operation.
 - Support work time preview, interruptible engraving and cutting re -continue after power off.
 - Dynamic 4.3 color TFT LCD display of trajectory and coordinate point, show the real work track area, laser power and speed.
 - Red Light Pointer realizes the exact laser beam cutting position.
 - Pass through for long length of work piece in Y-axis direction.
 - Machine is provided with mounting legs so there is no vibration in machine & it can be adjusted on zero level.

MODEL	EVA 21-II	EVA 32-II	EVA 43-II	EVA 48-II
X,Y Cutting Area	2' ft. x 1.5' ft. (600 mm x 457 mm)	3' ft. x 2' ft. (915 mm x 610 mm)	4' ft. x 3' ft. (1220 mm x 915 mm)	4' ft. x 8' ft. (1220 mm x 2440 mm)
Laser Power	60W	80W / 100W	80W / 100W / 130W	80W / 100W / 130W / 150W
Laser Source	Sealed Glass Co2 Laser Tube			
Travelling Speed	600 mm/s			
Reposition Accuracy	0.02 mm			
Minimum Letter Size	1.0 mm (English Font)			
X Y Movement System	Belt Transmission			
Z - Axis Movement	Automatic Up to 180 mm (optional)			
Power Adjustment	1 to 100 %			
Driving System	Stepper Motor/servo motor			
Operating System	Win 7 /8/10, 32/64 bit			
Computer Interface	Udisk, USB, Ethernet			
Supported Format	PLT, DXF, BMP, JPG, AI, DWG, BMP, GIF, HPGL			
Compatible Software	CorelDRAW, AUTOCAD, Photoshop, Tajima			
Working Voltage	Single Phase 220-230V / 50Hz-60Hz			
Operating Environment	45°C, Humidity 5% - 80%			
Memory Buffer	128 MB			
Fume Extraction System	External exhaust system with minimum flow rate 1200m3/h (CFM 706 ft3/h). Connection output 4" Diameter			
Overall Dimension (L x W x H)	1010 x 490 x 1030 mm	1170 x 1530 x 1000 mm	1450 x 1780 x 1070 mm	3440 x 2172 x 1030 mm
Weight	190 Kg	243 Kg	332 Kg	860 Kg
Power Consumption	1.2 KW	2 KW	2 KW	3.5 KW

EZ- II

CNC engraving & router machine - 2d/3d with closed loop motor

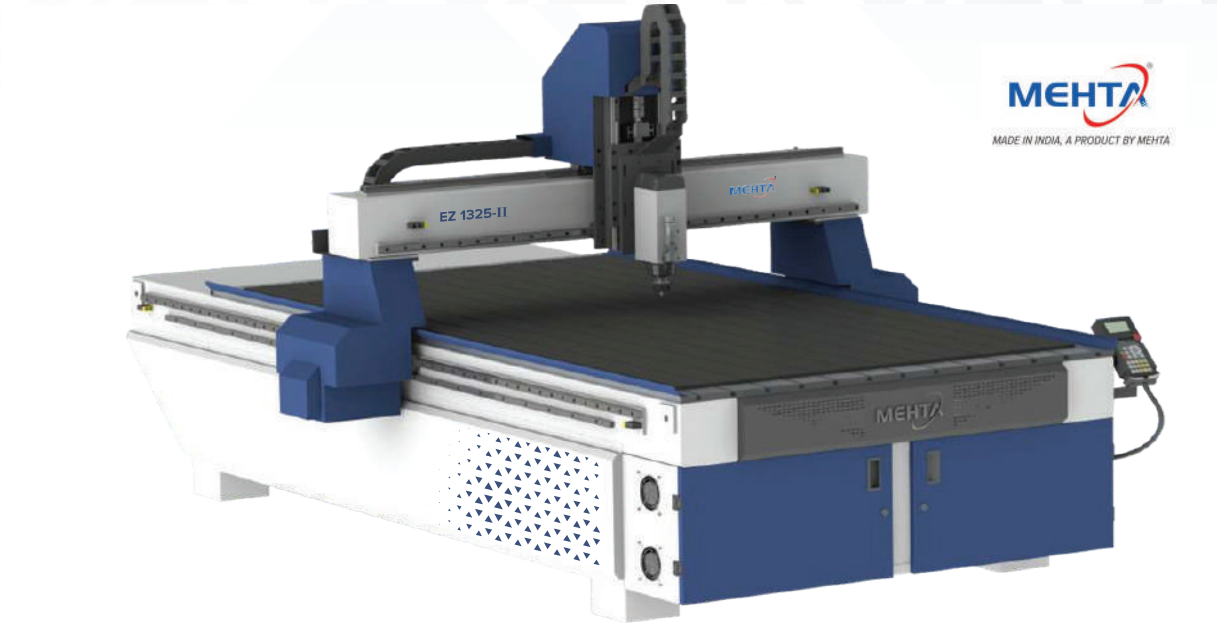

Hand Held Controller
Hand Held Controller allows operator to set job parameters, jog the machine, perform system test and download jobs from computer via USB cable and USB key also.

We welcome the enquiries for customized CNC Router, Any Size, Any Capacity!

FEATURES

- ▶ 25 MM Linear guideways for high positional accuracy and long life with high motion accuracy.
- ▶ Original HSD Italian spindle gives you very stable, trouble-free, maintenance-free performance for long period of time.
- ▶ Fast speed and high accuracy ensured by gear transmission equipped on CNC Router.
- ▶ High accuracy and heavy workload ensured by imported square rail.
- ▶ Lubrication maintenance provided by semi automatic lubrication system.
- ▶ Axis drive system : X, Y - Helical Rack, Z - Ball Screw.
- ▶ Working table is covered with rigid PVC sheet for long life aluminum T slot table.

SPECIFICATION

Lubrication System ▶



Model	EZ-1325-II
Outer Dimensions	2150 x 3300 x 1700
Working Area (X, Y, Z)	1300 x 2500 x 200 mm
Spindle	6 KW Air Cooled, HSD Italian Spindle
Spindle Speed	18000 RPM
Distance Between Bed & Gantry	200 mm
Maximum Traveling Speed	25 mtr/min
Cutting Tool Diameter	03 to 16 mm
Repeated Location	0.025 mm
Operating System	DSP-Hand Held Controller
Driving System	Closed Loop Motor
Power Supply	AC 420V / 3PH
Weight	970 Kg.

Specification are liable to change without prior notice. Note: AC420V power supply will be applicable for 6KW spindle.

EZ- II

CNC engraving & router machine - 2d/3d with closed loop motor



Lubrication System ►

SPECIFICATION

Model	EZ-II-1325
Outer Dimensions	2150 x 3300 x 1700
Working Area (X, Y, Z)	1300 x 2500 x 200 mm
Spindle	6 KW Air Cooled, HSD Italian Spindle
Spindle Speed	18000 RPM
Distance Between Bed & Gantry	200 mm
Maximum Traveling Speed	25 mtr/min
Cutting Tool Diameter	03 to 16 mm
Repeated Location	0.025 mm
Operating System	DSP-Hand Held Controller
Driving System	Closed Loop Motor
Power Supply	AC 420V / 3PH
Weight (approx.)	970 Kg.

Specification are liable to change without prior notice. Note: AC420V power supply will be applicable for 6KW spindle.

SAMPLES







The image shows a full-page view of a sheet of paper. The top half of the page is covered by a repeating geometric pattern of interlocking triangles, creating a complex, crystalline or snowflake-like design. The bottom half of the page is white and features horizontal ruling lines, typical of notebook paper. The pattern is light gray and covers approximately the upper 50% of the page.

This image shows a full-page view of a notebook or worksheet. At the top left, the word "NOTES" is printed in a bold, black, sans-serif font. The rest of the page is filled with horizontal blue lines, providing space for writing. A decorative orange-to-yellow gradient bar runs horizontally across the page, positioned just below the "NOTES" header.

NOTES



AMARI

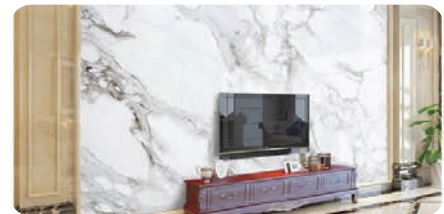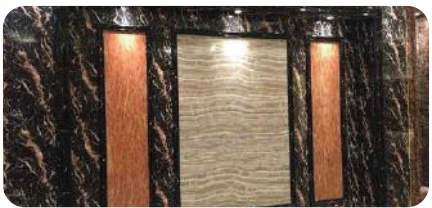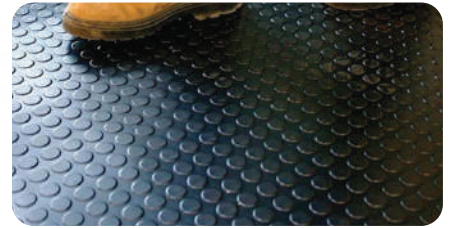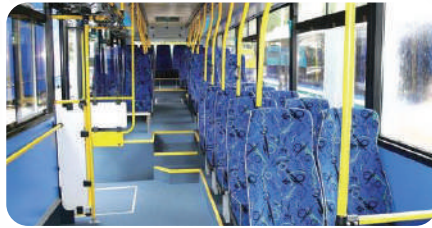

JHB

+27 11 314 3237

+27 11 312 5410

+27 72 163 6036

+27 60 502 1121

sales-amari@amaritrading.co.za

Unit 14, Alphen Square North, Cnr George & 16th Road,
Midrand, South Africa -1685

<https://www.amaritrading.co.za/>